## 8mm RIVET






Terms and Conditions





- Aluminium body
- Aluminium mandrel
- Neoprene washer

During installation, the body of the rivet folds into 3 separate legs which creates a large bearing surface and distributes the clamp force allowing soft or thin materials to be joined without damage. The mandrel of the rivet will break flush with the head over a wide grip range which results in impressive shear strength.

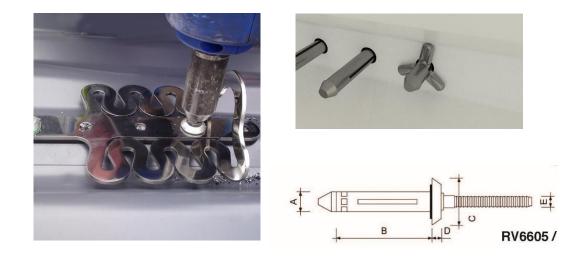

Product Code	Seal	Dia mm	Grip mm	Hole mm	A mm	B mm	C mm	D mm	E mm	Shear kN	Tensile kN
Rivet_8mm(27.7)	Green	7.7	1.1-9.5	7.8-8.2	7.7	28.2	18.3-19.4	3.8	4.4	6.7	4.9
Rivet_8mm(34)	Yellow	7.7	6.4-15.9	7.8-8.2	7.7	34.5	18.3-19.4	3.8	4.4	6.7	4.9
Rivet_8mm(39)	Black	7.7	9.5-19.1	7.8-8.2	7.7	37.7	18.3-19.4	3.8	4.4	6.7	4.9



ATA SHEE

## © 2018, SafetyLink Pty Ltd, Australia.

**Patents:** SafetyLink Pty Ltd has a multitude of patents, patents pending, design applications, trademarks and copyrighted documents both lodged and issued. Should you wish to know the progress of our intellectual property on a specific product please email us on ip@safetylink.com and quote the product code.

Doc ID: MKT-162 Version: 4.0

