

INSTALLATION HANDBOOK

SafetyLink Anchor Points

SafetyLink is an innovative anchor company achieving success and keeping you safe whilst working at heights.

- 🔍 ROOF ANCHORS
- 🔍 HORIZONTAL LIFELINES
- 🔍 PERMANENT LADDERS
- 🔍 LADDER STABILISERS
- 🔍 TEMPORARY ANCHOR



Read entire handbook before installing SafetyLink products. All products must be installed in accordance with SafetyLink's installation handbook, using only products supplied by SafetyLink Pty Ltd. Failure to follow all warnings and instructions may result in a serious injury or death.



SafetyLink Pty Ltd
AU: 1300 789 545
INT: +61 2 4964 1068
FAX: +61 2 4964 1069
info@safetylink.com

www.safetylink.com

WARNINGS	4
MAINTENANCE – PERIODIC INSPECTIONS	5
FIXED LADDERLINK: LADDER SUPPORT BRACKET	5
SAFETYLINK ANCHORAGES	5
WARRANTIES	6
FIXED LADDERLINK – LADDER SUPPORT BRACKET	7
INSTALLATION	7
FIXING TO RAFTER	7
FOR METAL ROOFS	7
FOR TILED ROOFS	7
FIXING TO CONCRETE WALL/PARAPET	8
FIXING TO TIMBER WALL/PARAPET	8
TILELINK ANCHOR UNIT	9
COMPONENTS	9
FITTING THE ANCHOR POINT	10
INSTALLATION OF TILELINK	10
RAFTERLINK ANCHOR POINT	11
INSTALLATION: ATTACHED TO TIMBER RAFTERS	11
FIXING RAFTERLINK	11
FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT	11
RAFTERLINK SIDE MOUNTED ANCHOR	12
INSTALLATION: TO THE SIDE OF A TIMBER RAFTER – EXISTING BUILDING	12
RIDGELINK ANCHOR POINT	13
INSTALLATION: ATTACHED TO RAFTERS AT THE TOP OF A RIDGE	13
FIXING RIDGELINK.....	13
FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT.....	13
HINGELINK STAINLESS STEEL ANCHOR POINT	14
INSTALLATION: TO THE SIDE OF A TIMBER RAFTER - EXISTING BUILDING.....	14
FIXING HINGELINK BRACKET.....	14
INSTALLING THE SAFETYLINK STAINLESS STEEL EYEBOLT	14
INSTALLATION: TO A TIMBER TRUSS AT THE TOP OF THE RIDGE.....	15
RETROLINK ANCHOR POINT	16
INSTALLATION: TO A STEEL C OR Z PURLIN	16
INSTALLATION OF THE RETRO TUBE	17
INSTALLATION OF RETRO EYEBOLT	17
PURLINK ANCHOR POINT	18
INSTALLATION: TO A STEEL C OR Z PURLIN	18

TABLE OF CONTENTS - 2 of 2

FROGLINK ANCHOR UNIT	19
BROWNBUILT / KLIPOK ROOF PROFILES	19
COMPONENTS	19
INSTALLATION: TO THE SURFACE OF A METAL ROOF	20
CLASSIC SURFACELINK ANCHOR	21
COMPONENTS	21
SETTING OUT	22
INSTALLATION TO THE SURFACE OF A ROOF - ASSEMBLING: STEPS 1 TO 5	23
INSTALLING: STEPS 1 TO 3	24
SURFACELINK ANCHOR STAINLESS STEEL – DOUBLE PLATES	25
COMPONENTS	25
ASSEMBLING: STEPS 1 TO 5	26
ASSEMBLING: STEPS: 6 TO 7	27
INSTALLING: STEPS 1 TO 3	27
CONCRETELINK ANCHOR POINT	28
CONCRETELINK COLLARED EYEBOLT ANCHOR	29
CONCRETELINK ONE PIECE EYEBOLT ANCHOR	30
CONCRETELINK ANCHOR POINT “EXTENDED”	31
WINDOWLINK ANCHOR POINT	32
SWIVELINK ANCHOR POINT	33
SPACERLINK ANCHOR POINT	34
APPENDIX – DIAGRAM 2 – ANCHOR POSITIONING LAYOUT	35
EXPERT FALL PROTECTION PLANNING	35
APPENDIX – DIAGRAM 3 – LATERAL BRACING STRAPS	36
APPENDIX – DIAGRAM 4 – POSITIONING HINGELINKS	37
APPENDIX – DIAGRAM 6 – HINGELINK ANCHORS	38
NOTES	39
IN CASE OF ACCIDENT	40



Installation Guide



Video Installation



Catalogue



www.safetylink.com
Terms/Conditions/Warranties



READ CAREFULLY SOMEONE'S LIFE DEPENDS ON IT

INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.

The building or structure for the anchorages should be assessed by an engineer, unless it is clear to a competent person that the anchorages system is structurally adequate.

STANDARD EYEBOLTS MUST ONLY BE USED AS A FALL ARREST ANCHOR.

ABSEILING EYEBOLTS ARE TO BE USED FOR ROPE ACCESS (ABSEILING).

SURFACE MOUNTED ANCHORS MUST NOT BE USED FOR ROPE ACCESS (ABSEILING).

RETRO EYEBOLTS USED FOR ROPE ACCESS (ABSEILING) EXCEPT ON HIGH PROFILE SECTION.


When installing anchor points all safety procedures must be complied with in accordance with the current safety code/s of practice/s for working at heights.

- Recommended waterproofing for roof tiles: *Sika Flex Co-Polymer Sealant*.
- Recommended waterproofing for metal roof: *Silicone Sealant*.
- All threads must be coated with Loctite prior to assembly. (IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions).
- A personal energy absorber or a fall-arrest device with a personal energy absorber must be used to connect to all SafetyLink Anchorages and (or) Strops.

⚠️ MAXIMUM USER PER EYEBOLT IS ONE (1)


WARNING

Locking hex nut must be fully screwed up the thread of the eyebolt to expose 30mm of thread. This thread must be fully screwed into the bracket, coat threads with Loctite, (IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions). Locking hex nut must be firmly tightened onto the bracket to stop the eyebolt from unscrewing and to gain maximum strength.

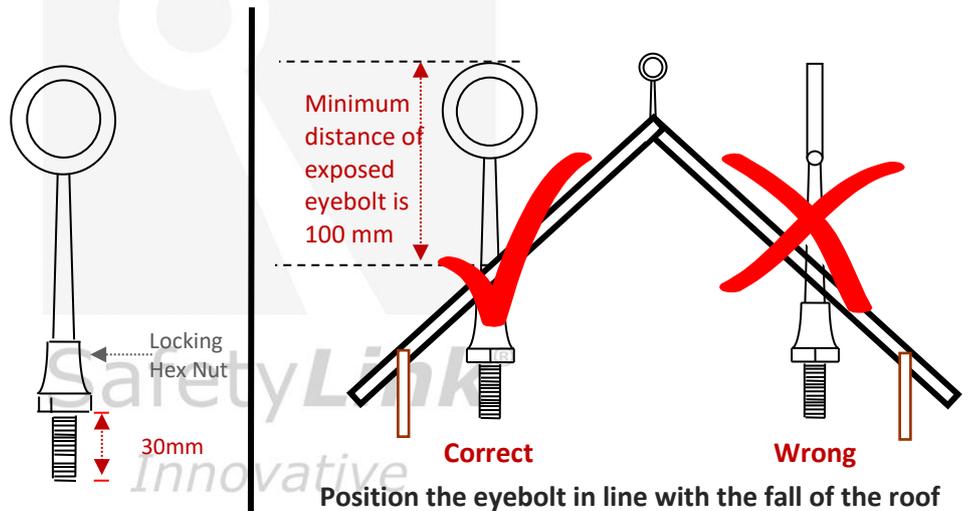


EYEBOLTS - Threads need to have a minimum of **SIX FULL 360° TURNS** into the ultimate thread.

RETRO EYEBOLTS - Threads need to have a minimum of **EIGHT FULL 360° TURNS** into the ultimate thread.

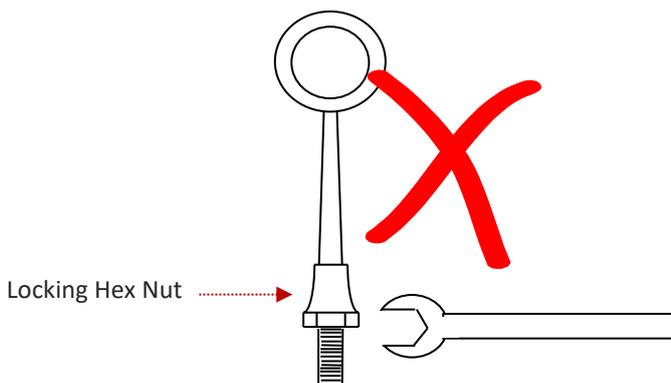

CORRECT

Always use a spanner when tightening and un-tightening the locking hex nut.

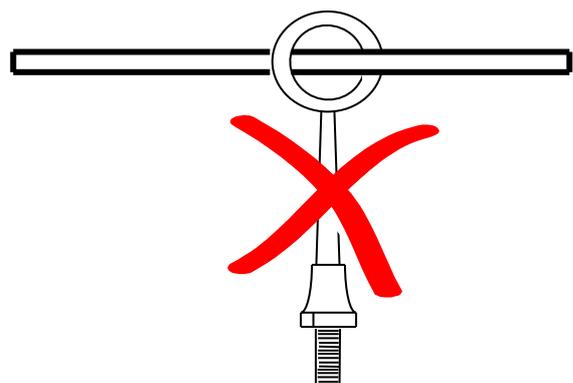

WRONG

DO NOT place an object into the eye of the eyebolt to tighten or un-tighten the locking hex nut, as this may damage the eyebolt.

MAINTENANCE – PERIODIC INSPECTIONS

All items of equipment which are in regular use shall be subjected to periodic inspection and servicing. These regular scheduled inspections and servicing must be carried out by a competent person.

FIXED LADDERLINK: LADDER SUPPORT BRACKET

ALL LADDERLINKS MUST BE INSPECTED EVERY 12 MONTHS, INSPECTIONS NEED TO BE CARRIED OUT BY A COMPETENT PERSON.

Procedures to be followed at inspection time:

- Visually inspect ladder support brackets for any signs of deterioration or the protective coating being removed. *(Note: LadderLink is made from marine grade aluminium and therefore should not corrode).*
- Ensure LadderLink is firmly secured to the structure as per SafetyLink Installation Handbook (refer to *Installing LadderLink in Handbook*).

SAFETYLINK ANCHORAGES

ALL ANCHORAGES MUST BE INSPECTED EVERY TWELVE MONTHS, INSPECTIONS NEED TO BE CARRIED OUT BY A COMPETENT PERSON.

Procedures to be followed at inspection time:

- Visually inspect anchors for signs of deterioration.
- The **FrogLink/TileLink** anchor point has two energy absorbing regions and two stabilising joints which hold the eyelet in place during use. If these energy absorbing regions are expanded this will indicate the anchor point has arrested a fall. Similarly, if the two stabilising joints have been broken this would also indicate the FrogLink/TileLink has arrested a fall and should be replaced.
- Visually inspect the **CableLink** anchor point for signs that it has arrested a fall. The cable will have tightened around the rafter and the bottom fixing point will be pulled out and the anchor will need to be replaced.
- The **Eyebolt** should remain straight, a bent eyebolt will indicate that the anchor point has arrested a fall *(The design features of the eyebolt includes the ability to bend like a fishing pole starting from the top and working its way to the bottom, enabling it to use up energy as the eyebolt bends whilst lessening the force on the person falling and the attachment point).*
- Visually inspect the components of the anchor for corrosion, superficial surface marking is permitted while deeper corrosion or pitting would require attention.
- Manually (by hand) check the eyebolt for rigidity and tightness, if the eyebolt can turn in the anticlockwise direction it will require attention.
- Visually inspect the rubber hat washer and waterproofing components to ensure it has remained sealed.
- Visually inspect the attachment component of the anchorage where practically possible.
- Visually inspect the parent structure for modifications or deterioration which might lead to loss of anchorage strength.
- Drilled in anchorages such as friction or glued-in anchorages (**ConcreteLink, SandwichLink, SpacerLink**) must be proof tested in accordance with AS/NZS 1891.4:2009 Clause 3.1.2(g) as part of each inspection.
- A **Personal Energy Absorber** or a fall-arrest device with a personal energy absorber must be used in conjunction with all SafetyLink Anchorages and Lifeline systems.

IN ADDITION TO SAFETYLINK PTY LTD EQUIPMENT, ALL ANCILLARY EQUIPMENT MUST BE INSPECTED IN ACCORDANCE WITH APPLICABLE REGULATORY REQUIREMENTS AND THE MANUFACTURER'S INSTRUCTIONS.



**FOR MAINTENANCE ADVICE AND SERVICES PLEASE CONTACT SAFETYLINK
ON +61 249 641068 OR 1300 789545 FOR YOUR NEAREST SAFETYLINK INSPECTION SERVICE
CENTRE OR EMAIL: info@safetylink.com**

WARRANTIES

EXTRACT: SafetyLink Pty Ltd STANDARD TERMS AND CONDITIONS

- 11.1 To the extent permitted by law all implied conditions, warranties and undertakings are expressly excluded.
- 11.2 Except as provided in this clause the Company shall not be liable for any loss or damage, whether direct or indirect (including consequential losses or damage) arising out of any breach of contract by the Company or any negligence of the Company, its employees or agents.
- 11.3 Should the Company be liable for a breach of a guarantee, condition or warranty implied by the Australian Consumer Law (not being a guarantee, condition or warranty implied by sections 51, 52 and 53 of that Law) then its liability for a breach of any such condition or warranty express or implied shall be limited, at its option, to any one or more of the following.
- A) in case of Goods
- (I) the replacement of the Goods or the supply of equivalent Goods.
 - (II) the repair of the goods,
 - (III) the payment of the cost of replacing the Goods or acquiring equivalent Goods.
 - (IV) The payment of the cost of having the Goods repaired.
- Provided that any such Goods are returned to the Company by the Purchaser at the Purchaser's expense.
- B) in the case of services
- (i) the supply of the services again,
 - (ii) the payment of the cost of having the services supplied again.
- 11.4 The Company will not be liable for the costs of recovery of the Goods from the field, loss of use of the Goods, loss of time, inconvenience, incidental or consequential loss or damage, nor for any other loss or damage of her than as stated above, whether ordinary or exemplary, caused either directly or indirectly by use of the Goods.
- 11.5 The Company warrants that at the time of shipment, Products manufactured by it will be free from defects in material and workmanship. In the absence of a modified written warranty, the Company agrees to making good any such defects by repairing the same or at the Company's option by replacement, for a period of (1) one year from the date of shipment. This limited warranty applies provided that:
- (a) defects have arising solely from faulty materials or workmanship;
 - (b) the Products have not received maltreatment, inattention or interference;
 - (c) **the Products have been installed in accordance with the Company's Installation Handbooks using only products supplied by the Company;**
 - (d) accessories used with the Products are manufactured by or approved by the Company;
 - (e) the Products are maintained in accordance with Australian Standard 1891.4 (section 9).
 - (f) you notify any claim under this warranty to SafetyLink in writing to the address below no later than 14 days after the event or occurrence concerning the product giving rise to the claim and you pay all costs related to your claim.

This warranty does not apply to any defects or other malfunctions caused to the Goods by accident, neglect, vandalism, misuse, alteration, modification or unusual physical, environment or electrical stress.

Please note that the benefits to the purchaser (as a consumer) given by this warranty are in addition to your other rights and remedies under the Australian Consumer Law. Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

- 11.6 If any goods are not manufactured by the Company, the guarantee of the manufacturer thereof shall be accepted by the Purchaser as the only express warranty given in respect of the goods.
- 11.7 Except as provided in this clause 11, all express and implied warranties, guarantees and conditions under statute or general law as the merchantability, description, quality, suitability or fitness of the Products for any purpose or as to design, assembly, installation, materials or workmanship or otherwise are hereby expressly excluded (to the extent to which they may be excluded by law).

PLEASE SEE SAFETYLINK PTY LTD FULL STANDARD TERMS OF CONDITIONS OF SALE FOR FURTHER REFERENCE.

FIXED LADDERLINK – LADDER SUPPORT BRACKET

Standard Size – Product Code: LADFX001

Extended Size – Product Code: LADFX002

INSTALLATION

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

Fixed LadderLink Safe Ladder Access: Made from marine grade aluminium the LadderLink is designed to support a ladder, stopping sideways movement and therefore holding the ladder in place safely. In addition, the LadderLink has securing points to tie off the ladder providing a safe access point.



FIXING TO RAFTER


To install the LadderLink simply place under the roof sheeting or tiles and secure to the top of a rafter and roof batten as shown in the drawings below. Bracket may need to be adjusted to suit different roof pitches.

- ⚠ **ADJUSTING THE PITCH OF THE LADDERLINK IS TO BE DONE BY A SHEET METAL FABRICATORS' BENDING MACHINE. LADDERLINK IS MADE FROM HIGH TENSILE ALUMINIUM THEREFORE ENSURE THE BENDER IS SET ON A HIGH RADIUS TO PREVENT CRACKING.**
- ⚠ **PROTECTIVE COATING MUST NOT BE REMOVED.**

FOR METAL ROOFS

Use five type 17 Hex Head 12g x 65mm screws into batten.


LadderLink cradles the rung of the ladder and stops lateral movement.

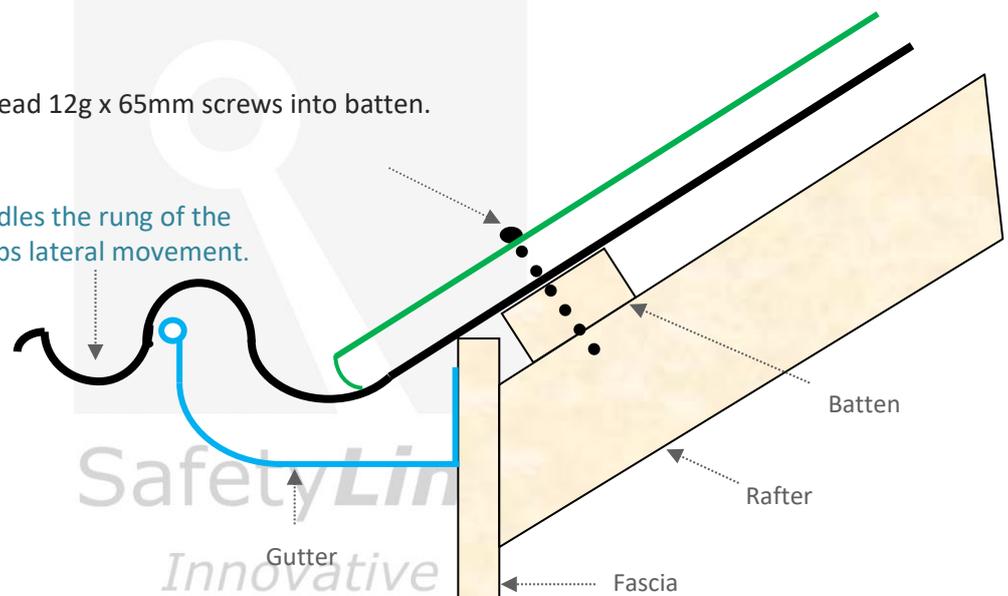

FOR TILED ROOFS

Use two type 17 Hex Head 14g x 100mm screws into rafter and three type 12g x 65mm screws into the batten.

LadderLink cradles the rung of the ladder and stops lateral movement.

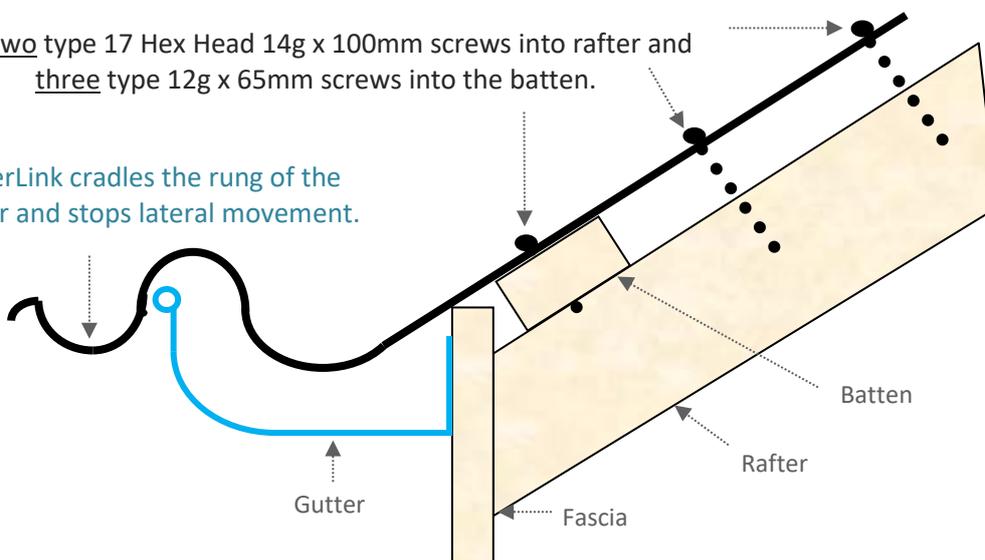

FIXED LADDERLINK – LADDER SUPPORT BRACKET

FIXING TO CONCRETE WALL/PARAPET



Drill and install 4 (four) x 10mm Dyna bolts or equivalent chemical anchor.
Bolts need to be a minimum of 150mm from an edge.

Wall Mounted - Product Code: LADFX003

FIXING TO TIMBER WALL/PARAPET

Drill and install 4 (four) x size 14-10 x 75mm roofing screws.

LadderLink cradles the rung of the ladder and stops lateral movement.

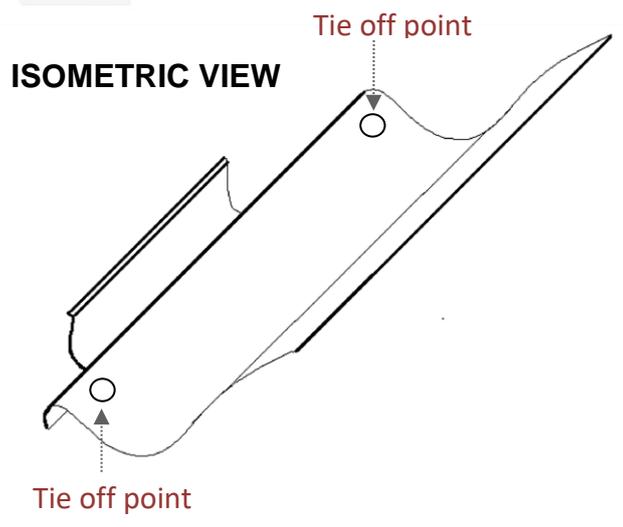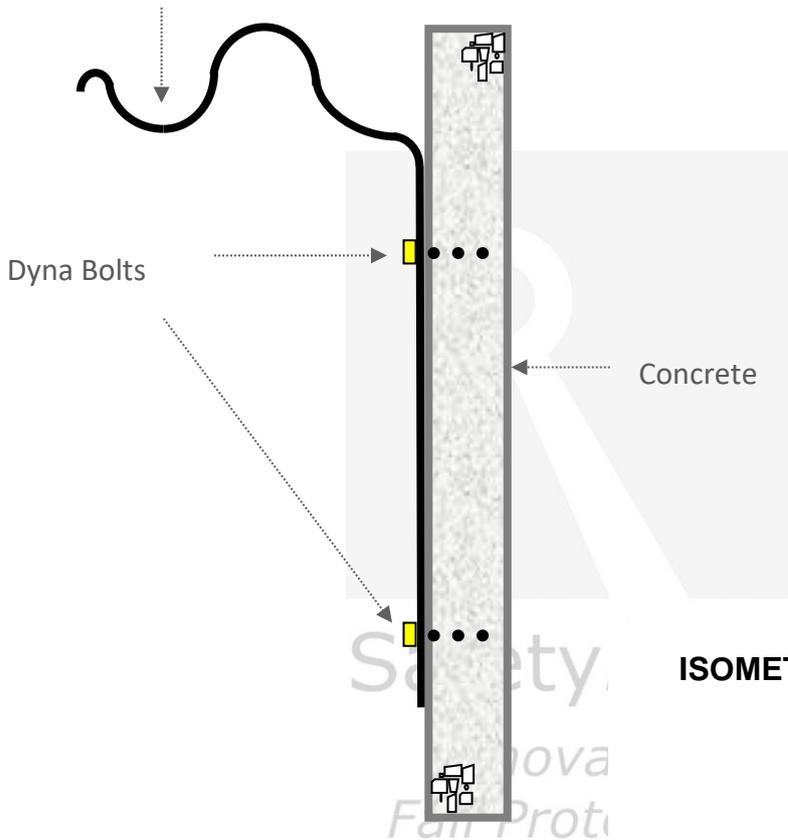

Install Webinar



Installation Guide



Video Installation
METAL ROOF



Video Installation
TILE ROOF



Catalogue



All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

⚠ TILELINK ANCHORS MUST NOT BE USED FOR ROPE ACCESS (ABSEILING).

POSITIONING OF TILELINK ANCHOR POINT (refer to Appendix Diagram 2)

The first TileLink anchor point must be in a position easily and safely reached from a safe access point.


INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

COMPONENTS

TileLink Anchor Plate

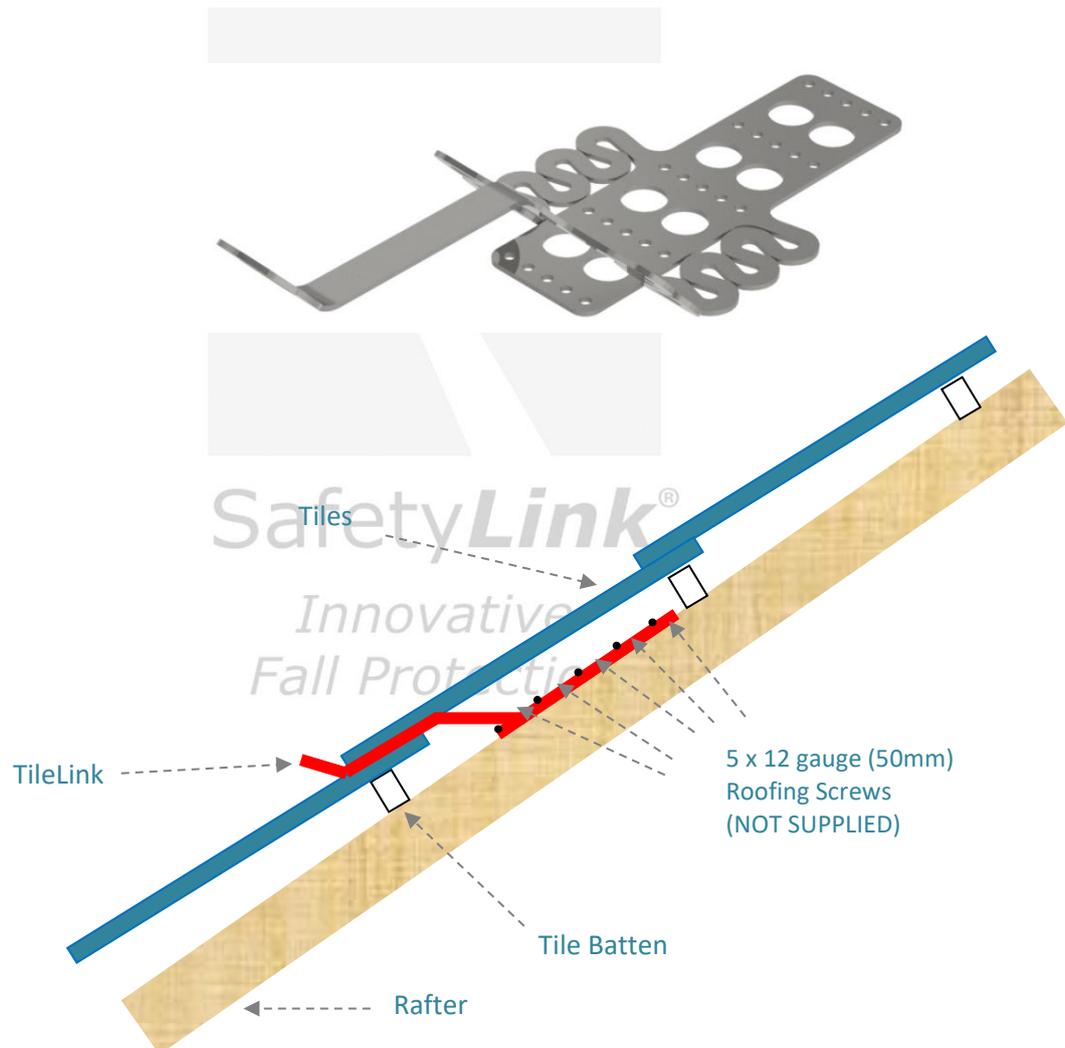


FITTING THE ANCHOR POINT

Before installation adjust the plate to suit the profile of the roof. The anchor plate also has five (5) alternative fixing lines. Choose one line only to secure the plate to the top of the rafter to suit the pattern of the tiles.

TileLink is to be secured using five (5) fixing points. Pilot holes must be drilled into the timber the full length of each screw to avoid splitting the timber. There are five (5) alternate rows to choose to suit the tile profile, five examples illustrated below:

NOTE: MAKE SURE ONE LINE OF THE FIXING HOLES IS IN LINE WITH THE CENTRE OF THE RAFTER.

FIVE (5) ALTERNATE FIXING ROWS: Use 5 x 12 gauge (50mm) roofing screws

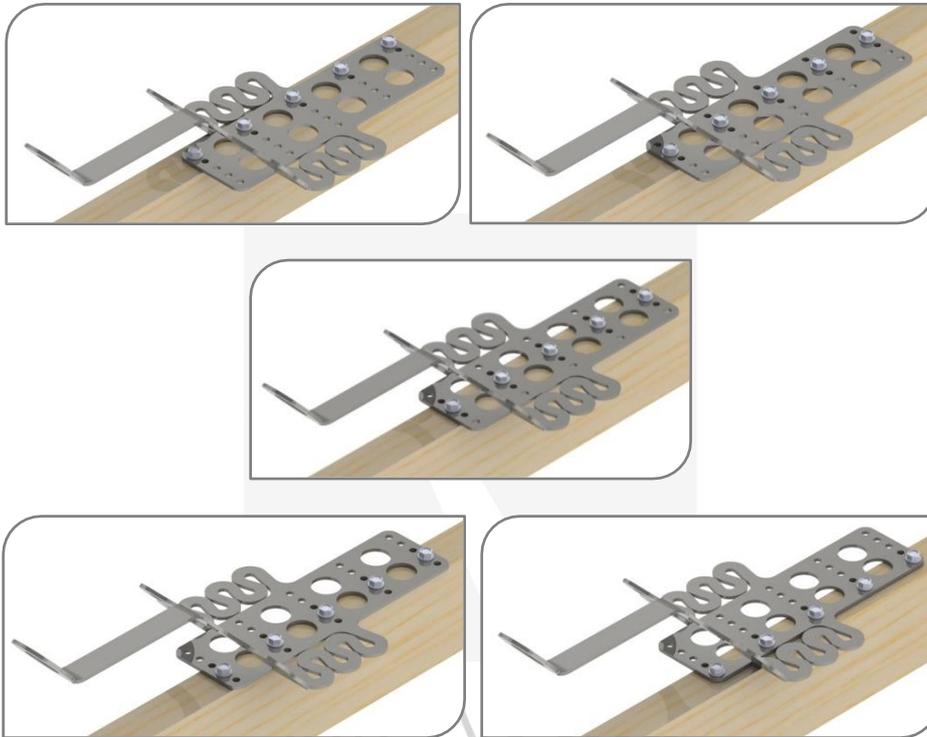

INSTALLATION OF TILELINK

1. Remove the roof tiles in desired location to expose the rafter.
2. Place TileLink in position to best suit tile pattern, making sure **one line of the fixing holes lines up with the centre of the rafter.**
3. Pump silicone between the anchor plate and the bottom tile.
4. Secure TileLink plate to the rafter using **five (5) x 12 gauge (50mm) roofing screws**. Pilot holes must be drilled into the timber the full length of each screw to avoid splitting the timber.
5. Put more silicone onto the top of the anchor plate and also on the bottom tile on either side of the anchor plate and also across the bottom tile affectively gluing the bottom tile to the top tile.
6. Place the top tile into position sandwiching the anchor point.
7. Re nail the top tile back into place.
8. Replace all removed roof tiles back into their original position.
9. The SafetyLink anchor point is now ready for use, giving you, an anchor point to attach to while installing the next SafetyLink anchor point.

Live Load on Anchors:

The TileLink anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees TileLink anchors should be used in conjunction with other access methods to ensure no live loading. Note: These anchors are not abseiling anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

⚠ LATERAL BRACING STRAPS MUST BE USED IF THERE IS A POSSIBILITY OF FALLING IN A DIRECTION 45 TO 90 DEGREES TO THE RAFTER (REFER TO APPENDIX DIAGRAM).

INSTALLATION: ATTACHED TO TIMBER RAFTERS

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF RAFTERLINK ANCHOR POINT (refer to *Appendix Diagram*)

The first RafterLink anchor point must be in a position easily and safely reached from a safe access point.

⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.

INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions. *RafterLink can be used with both the standard and abseiling eyebolts, the abseiling eyebolt is required on pitches greater than 30 degrees.*

FIXING RAFTERLINK

1. Fixing to hardwood F14 or greater use 8 type 17 Hex Head 14g x 75mm screws.
2. Fixing to softwood less than F14, use 8 type 17 Hex Head 14g x 90mm screws.
3. **4.5mm pilot holes must be drilled into the timber the full length of each screw** to avoid timber splitting.
4. Drilling a hole close to edge of timber, the hole should be slightly angled inward from the edge giving the screw a stronger hold.

FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. When screwing the locking hex nut onto the eyebolt make sure it is fully screwed up exposing 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).
2. Place the Lateral Bracing Strap across the rafters and screw the eyebolt through the strap and into the RafterLink and tighten the locking hex nut using a spanner (refer to *Warnings*), then screw the Lateral bracing strap down onto the adjacent rafters.
3. The strength of the lateral bracing needed depends on the structure and the amount of risk of a lateral fall off the roof but if any doubt exists as to the strength of the structure an engineer should make the assessment.

RELOCATING EYEBOLTS DURING THE INSTALLATION OF THE ROOF

You must be safely attached to an anchor point or using an alternative form of roof safety while removing and replacing the eyebolts. Use a spanner to release the locking hex nut then unscrew the eyebolt.

MARKING THE HOLE IN THE ROOF


Measure the position using two reference points and drill a 16mm hole. For a metal roof simply screw a marker pin into the RafterLink and lay the roof sheet in position and push down on the roof sheet. The pin should mark the position of the 16mm hole to be drilled.

READY TO REPLACE THE EYEBOLT

1. The rubber washer should be on the eyebolt.
2. Place the eyebolt through the 16mm hole and Screw the locking hex nut onto the eyebolt exposing 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**) (refer to *Warnings*).
3. Screw the eyebolt all the way into the stainless steel bracket.
4. Before tightening the locking hex nut turn the eyebolt to line up with the fall of the roof. Tighten the locking hex nut using a spanner.

Threads need to have a minimum of six full 360° turns into the ultimate thread.

WATERPROOFING (apply only to a dry surface) - Use a sealant between the rubber washer and roof sheeting to waterproof the roof.

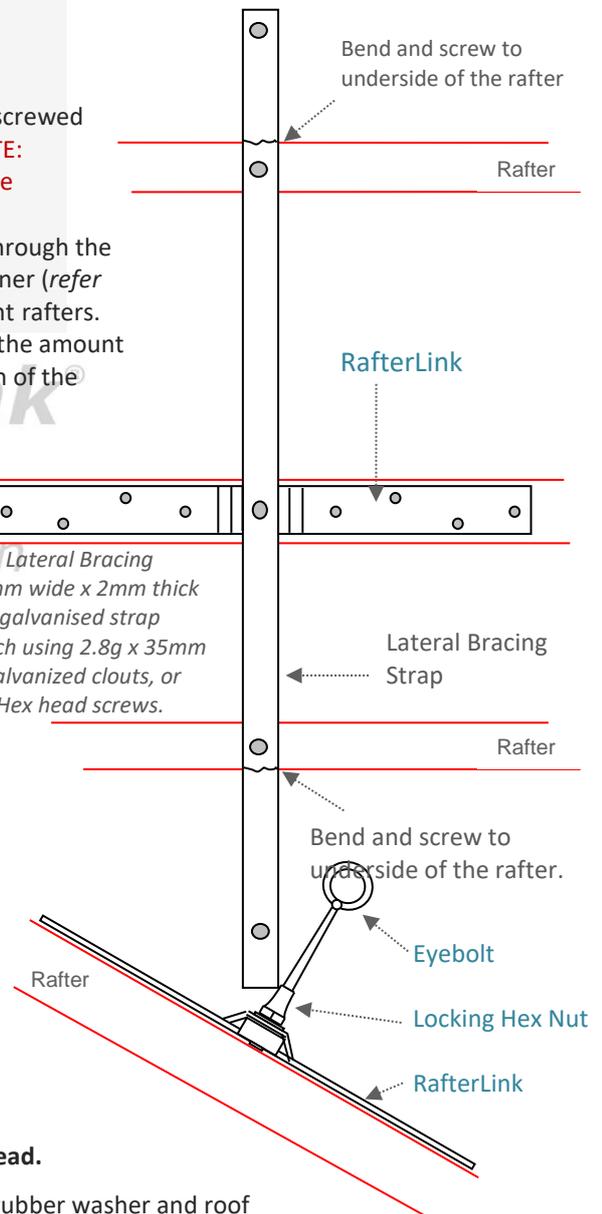

RAFTERLINK SIDE MOUNTED ANCHOR

Product Code: RAFTR004

INSTALLATION: TO THE SIDE OF A TIMBER RAFTER – EXISTING BUILDING

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF RAFTERLINK ANCHOR POINT (refer to [Appendix Diagram](#))

The first RafterLink anchor point must be in a position easily and safely reached from a safe access point.


INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions. RafterLink can be used with both the standard and abseiling eyebolts, the abseiling eyebolt is required on pitches greater than 30 degrees.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

FIXING THE RAFTERLINK

1. Place the bracket in centre of the rafter, 80mm down from the underside of the roof sheeting.
2. 4.5mm pilot holes must be drilled into the timber, through the holes in the RafterLink, the full length of each screw to avoid timber from splitting.
3. 8 type 17 Hex Head 14g x 50mm screws in prepared holes (minimum timber size 90mm x 35mm F5).

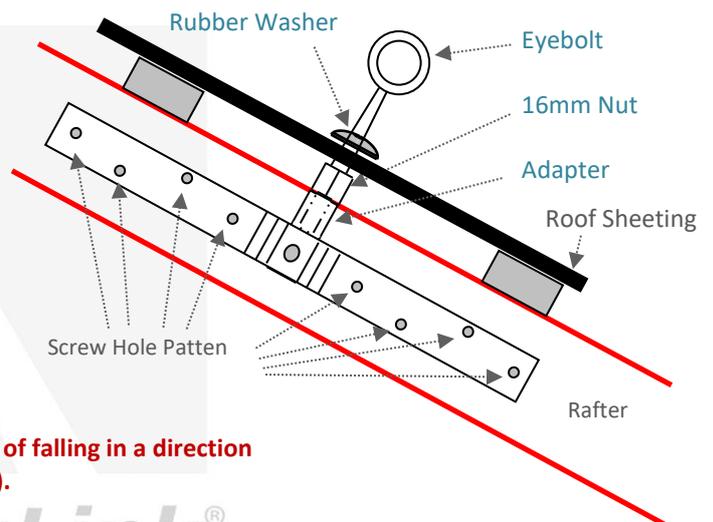

- ⚠ Lateral bracing straps must be used if there is a possibility of falling in a direction 45 to 90 degrees to the rafter (refer to [Appendix Diagram](#)).**

INSTALLING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. This requires one installer on the top of the roof sheeting and the other under the roof sheeting.
2. To stay safe while installing the first anchor point, the eyebolt should be positioned so you can reach it off a secured ladder or access point.
3. The person on the roof makes sure the rubber washer is on the eyebolt before slipping the eyebolt through the 16mm hole.
4. The person underside of the roof screws the locking hex nut fully onto the eyebolt exposing 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**) (refer to [Warnings](#)).
5. The person on the roof is now ready to screw the eyebolt all the way into the RafterLink.
6. Before tightening the locking hex nut turn the eyebolt to line up with the fall of the roof (refer to [Warnings](#)).
7. The person underside of the roof tightens the locking hex nut using a spanner.

Threads need to have a minimum of **six full 360° turns** into the ultimate thread.

WATERPROOFING (apply only to a dry surface) The person on the roof uses a sealant between the rubber hat washer and the roof sheeting to waterproof the roof.

The SafetyLink anchor point is now ready for use, giving you an anchor point to attach to while installing the next SafetyLink.



INSTALLATION: ATTACHED TO RAFTERS AT THE TOP OF A RIDGE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system. **If any doubt exists with the strength of the structure an engineer should make the assessment.**

POSITIONING OF RIDGELINK ANCHOR POINT (refer to [Appendix Diagram](#))

The first RidgELink anchor point must be in a position easily and safely reached from a safe access point.

INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions.

FIXING RIDGELINK

1. Fixing to hardwood F14 or greater, use 8 type 17 hex head 14g x 75mm screws.
2. Fixing to softwood less than F14, use 8 type 17 hex head 14g x 90mm screws.
3. Placing the eyebolt in the bracket makes it easier to check the eyebolt for plumb.
4. Place the bracket across the ridge and down the two opposing rafters, make sure the eyebolt is plumb then mark the holes (refer to [Appendix Diagram](#)).
5. **4.5mm pilot holes must be drilled into the timber the full length of each screw** to avoid splitting the timber.
6. Drilling a hole close to the edge of the timber, the hole should be slightly angled inward from the edge giving the screw a stronger hold.
7. To stay safe while installing the first anchor point the eyebolt should be positioned so you can reach it off a secured ladder or scaffold.

FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. When screwing the locking hex nut onto the eyebolt make sure it is fully screwed up exposing 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions.**)
2. Place the Lateral bracing strap along the ridge and screw the stainless steel eyebolt through the strap and into the stainless steel bracket and tighten the locking hex nut using a spanner (refer to [Warnings](#)).
3. Then screw the strap down onto the ridge giving the bracket lateral strength (refer [Appendix Diagram](#)).

RELOCATING EYEBOLTS DURING THE INSTALLATION OF THE ROOF

You must be safely attached to an anchor point or using an alternative form of roof safety while removing and replacing the eyebolts. Use a spanner to release the locking hex nut then unscrew the eyebolt.

MARKING THE HOLE IN THE ROOF

Measure the position using two reference points and drill a 16mm hole. For a metal roof simply screw a marker pin into the bracket and lay the sheet or ridge in position and push down on the roof sheet. The pin should mark the position of the 16mm hole to be drilled.


READY TO REPLACE THE EYEBOLT

1. The rubber washer should be on the eyebolt., place the eyebolt through the 16mm hole and screw the locking hex nut onto the eyebolt exposing 30mm of thread (refer to [Warnings](#)).
2. Then screw the eyebolt all the way into the stainless steel bracket (coat threads with Loctite).
3. Before tightening the locking hex nut turn the eyebolt to line up with the fall of the roof (refer to [Warnings](#)).
4. Tighten the locking hex nut using a spanner.

WATERPROOFING (apply only to a dry surface)

Use a sealant between the rubber washer and the roof sheeting to waterproof the roof. The anchor point is now ready for use.

Lateral bracing straps must be used if there is a possibility of falling in a direction 45 to 90 degrees to the rafter (Refer to [Appendix Diagram](#)).

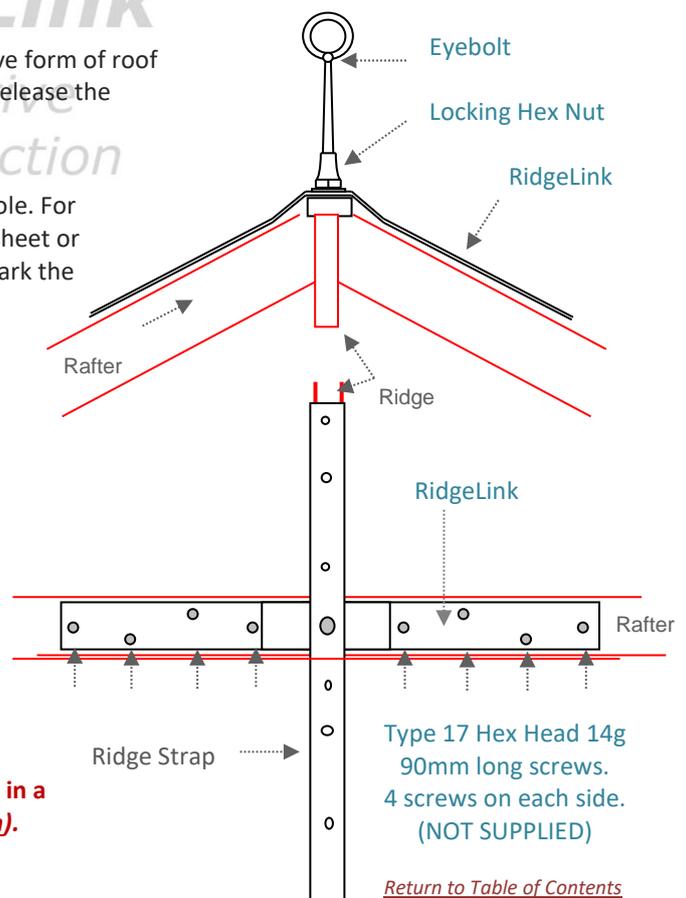

HINGELINK STAINLESS STEEL ANCHOR POINT

Product Code: HINGE001

INSTALLATION: TO THE SIDE OF A TIMBER RAFTER - EXISTING BUILDING

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF HINGELINK ANCHOR POINT (refer to [Appendix Diagram 2](#))

The first HingeLink anchor point must be in a position easily and safely reached from a safe access point.


INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

FIXING HINGELINK BRACKET

1. **Tip:** Place the bracket in centre of rafter, 80mm down from the underside of the roof sheeting, mark the centre of hole for the eyebolt and the bolt holes in the bracket.
2. Use markings to drill required holes.
3. To secure the bracket use 4 type 12mm steel bolts with washers under the nut (**coat threads with Loctite**).
4. Use 2 Hex Head 12g 40mm screws in the small holes.

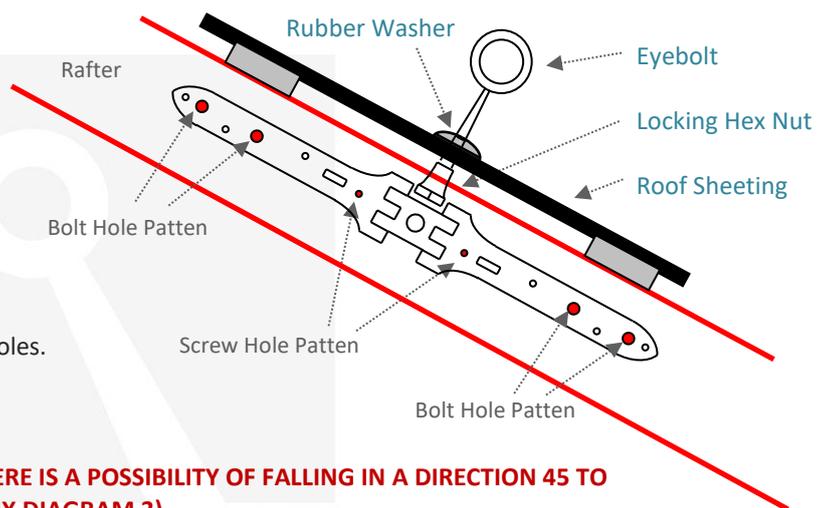

- ⚠ LATERAL BRACING STRAPS MUST BE USED IF THERE IS A POSSIBILITY OF FALLING IN A DIRECTION 45 TO 90 DEGREES TO THE RAFTER (REFER TO [APPENDIX DIAGRAM 3](#)).**

INSTALLING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. This requires one installer on the top of the roof sheeting and the other under the roof sheeting.
2. To stay safe while installing the first anchor point the eyebolt should be positioned so you can reach it off a secured ladder or access point.
3. The person on the roof makes sure the rubber washer is on the eyebolt before placing the eyebolt through the 16mm hole.
4. The person underside of the roof screws the locking hex nut fully onto the eyebolt exposing 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer instructions**) (refer to [Warnings](#)).
5. The person on the roof is now ready to screw the eyebolt all the way into the HingeLink Hinged Bracket.
6. Before tightening the locking hex nut turn the eyebolt to line up with the fall of the roof (refer to [Warnings](#)).
7. The person underside of the roof tightens the locking hex nut using a spanner.

Threads need to have a minimum of **six full 360° turns** into the ultimate thread.

Note: use the same procedure to install a SafetyLink Abseiling Eyebolt, SafetyLink Intermediate T Bolt, SafetyLink End Anchor Taper Bolt.

WATERPROOFING (apply only to a dry surface) The person on the roof uses a sealant between the rubber hat washer and the roof sheeting to waterproof the roof.

The SafetyLink anchor point is now ready for use, giving you an anchor point to attach to while installing the next SafetyLink.

HINGELINK STAINLESS STEEL ANCHOR POINT

Product Code: HINGE001

INSTALLATION: TO A TIMBER TRUSS AT THE TOP OF THE RIDGE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF HINGELINK ANCHOR POINT (refer to [Appendix Diagram](#))

The first HingeLink anchor point must be in a position easily and safely reached from a safe access point.

INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with current building codes and manufactures instructions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

FIXING THE HINGELINK STAINLESS STEEL BRACKET

- Placing the eyebolt in the HingeLink makes it easier to check the eyebolt for plumb.
- Place the HingeLink over the truss and down either side sandwiching the truss making sure the eyebolt is plumb then mark and drill three at 12.2mm holes.
- Use three only 12mm mild steel bolts (coat threads with Loctite).


FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT

- When screwing the locking hex nut onto the eyebolt make sure it is fully screwed up exposing 30 mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**). (refer to [Warnings](#)).
- Place the hoop iron strap along the rafter and screw the eyebolt through the strap and into the HingeLink, tighten the locking hex nut using a spanner.
- Then screw the strap down onto the rafters of the truss using 6 of 12g x 40mm screws.

This gives you an anchor point to attach to while installing the next SafetyLink.

RELOCATING THE EYEBOLTS DURING THE INSTALLATION OF A ROOF

You must be safely attached to an anchor point or using an alternative form of roof safety while removing and replacing the eyebolts. Use a spanner to release the locking hex nut then unscrew the eyebolt and remove the locking hex nut.

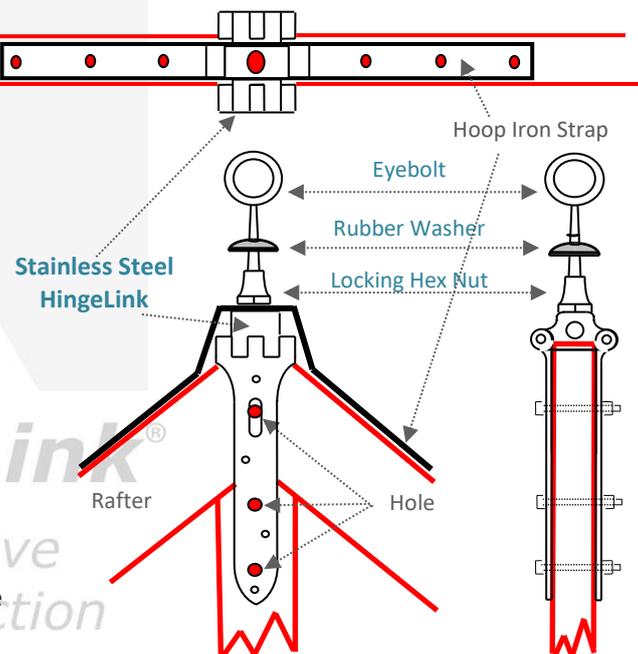

MARKING THE HOLE IN THE ROOF SURFACE

- Measure the position using two reference points and drill a 16mm hole.
- For a metal roof simply screw a marker pin into the HingeLink and lay the sheet or ridge in position and push down on the roof sheet. The pin should mark the position of the 16mm hole to be drilled.

READY TO REPLACE THE EYEBOLT

- The rubber washer should be on the eyebolt, place the eyebolt through the 16mm hole and screw the locking hex nut onto the eyebolt exposing 30mm of thread (coat threads with Loctite) (refer to [Warnings](#)).
- Screw the eyebolt all the way into the HingeLink.
- Before tightening the locking hex nut turn the eyebolt to line up with the fall of the roof (refer to [Warnings](#)).
- Tighten the locking hex nut using a spanner.

Threads need to have a minimum of six full 360° turns into the ultimate thread.

WATERPROOFING (apply only to a dry surface)


Use a sealant between the rubber washer and the roof sheeting to waterproof the roof.

RETROLINK ANCHOR POINT

Product Code: RETRO003

INSTALLATION: TO A STEEL C OR Z PURLIN

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

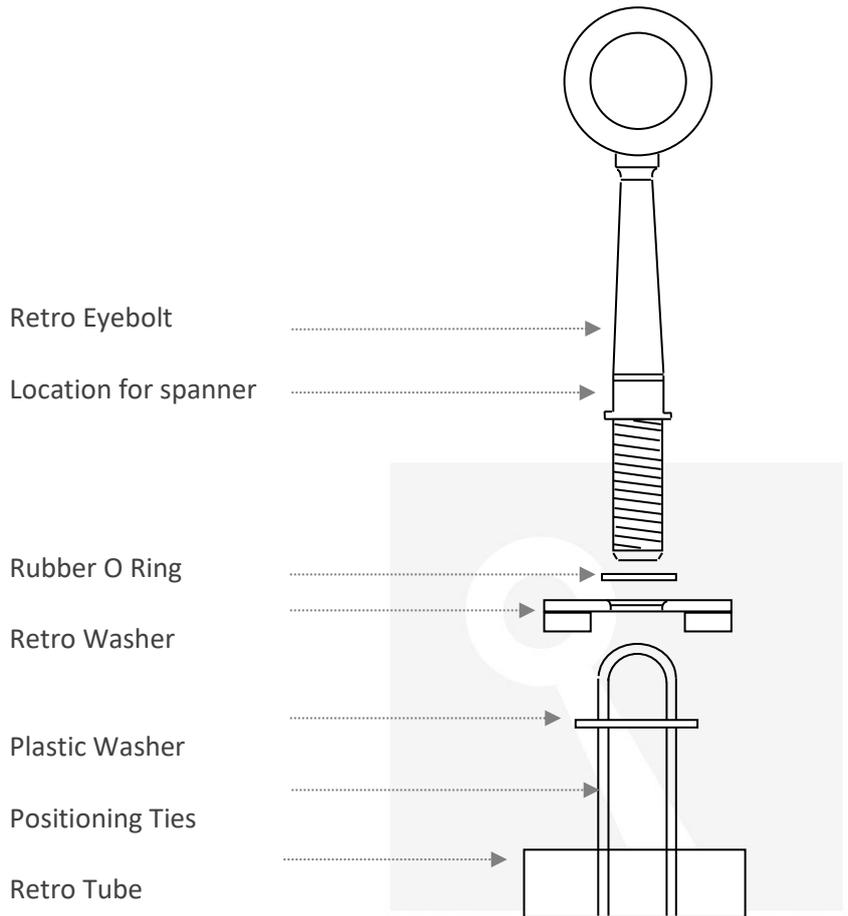

SafetyLink®

POSITIONING OF RETROLINK

The first Retrolink anchor point must be in a position easily and safely reached from a safe access point.

INSPECT THE STRUCTURE FOR STRENGTH

Steel purlins must be a minimum 1.2mm gauge and be correctly secured in accordance with current Australian Building Codes.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

LOCATING THE PURLIN

If the roof sheets are screwed down, then use these screws as a guide to locate the purlin. If the roof sheeting has concealed fixings, finding the purlin is more difficult. You can lift a sheet to find the purlin or by walking on the roof you can feel the purlin. You can also use a strong magnet to find the purlin.



SAFETYLINK RETROLINK ANCHORS INSTALLED TO THE RAISED SECTION OF ROOF SHEET PROFILES ARE NOT SUITABLE FOR ROPE ACCESS/ABSEILING DUE TO POTENTIAL ROOF SHEET DISTORTION UNDER LIVE LOADINGS.

Product Code: RETRO004




RETROLINK ANCHOR POINT

Product Code: RETRO003

INSTALLATION: TO A STEEL C OR Z PURLIN


INSTALLATION OF THE RETRO TUBE

1. Locate the centre of the purlin and drill a 25mm hole.
2. Hold onto the positioning ties and slide the Retro Tube vertically through the 25mm hole. Once the tube is through the hole, reorientate it to a horizontal position.
3. Slide the plastic washer down the positioning ties and draw the Retro Tube up to the underside of the purlin or post.

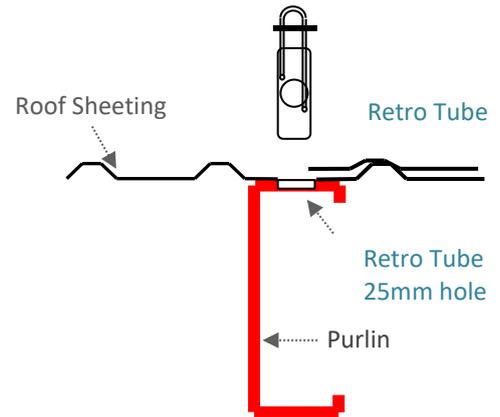


INSTALLATION OF RETRO EYEBOLT

1. Place the Retro Eyebolt through the Retro Washer. Remove sticker from foam washer. Apply silicon to the roof sheeting around the plastic washer.
2. Coat Eyebolt thread with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).
3. Thread the Retro Eyebolt into the Retro Tube then tighten the eyebolt so it lines up with the run of the roof.

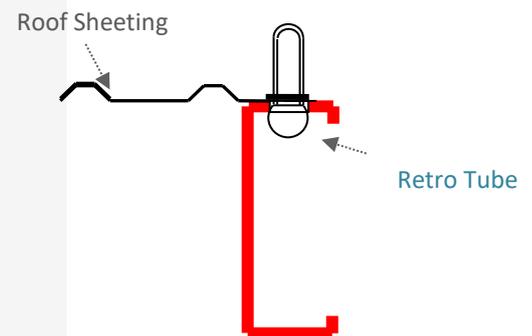

Threads need to have a minimum of minimum of **EIGHT FULL 360° TURNS** into the ultimate thread.

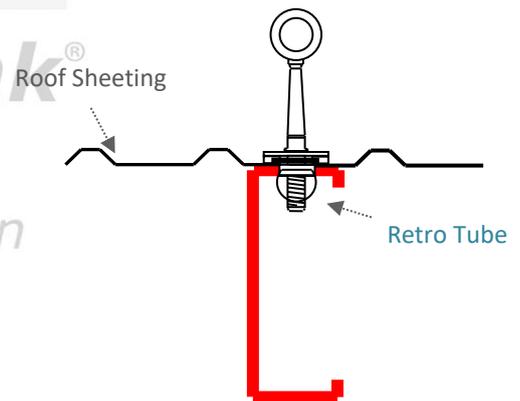

WATERPROOFING (apply only to a dry surface)

Apply a sealant between the retro washer and the roof sheeting ensuring you fill the entire section under the washer, this will fill the void under the washer ensuring there will be no water penetrations. **Make sure you use plenty of sealant where it is needed as it is costly to return and do it again.**

The SafetyLink anchor point is now ready for use, giving you an anchor point to attach to while installing the next SafetyLink.



Install Webinar



Installation Guide



Video Installation



Catalogue



INSTALLATION: TO A STEEL C OR Z PURLIN

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF PURLINK (refer to *Appendix Diagram*)

The first PurLink anchor point must be in a position easily and safely reached from a safe access point.

INSPECT THE STRUCTURE FOR STRENGTH

Steel purlins must be a minimum 1.2mm gauge and be correctly secured in accordance with current building codes and manufactures instructions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

MARKING AND DRILLING THE PURLINK TO STEEL C AND Z PURLIN

1. This requires one installer on the top of the roof sheeting and the other under the roof sheeting.
2. When working from under the roof sheeting first establish the centre of the high part of the profile of the roof sheeting and mark the centre of the purlin.
3. Once the position of the PurLink is established simply drill a 6mm pilot hole through the purlin and roof sheeting.
4. From above the roof sheeting, drill a 25mm hole through the roof sheeting only, then drill a 16mm hole through the purlin. **You are now ready to install the eyebolt.**

FIXING THE SAFETYLINK STAINLESS STEEL EYEBOLT


1. Place the rubber washer onto the eyebolt.
2. When screwing the locking hex nut onto the stainless steel eyebolt make sure it is fully screwed up exposing 30 mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions.**) (refer to *Warnings*).
3. Place the eyebolt through the 16mm hole, make sure the eyebolt is lined up with the fall of the roof (refer to *Warnings*).
4. Now the person under the roof sheeting fits the steel block then a washer onto the eyebolt before screwing on a 16mm stainless steel nut.
5. Tighten using a spanner.

Threads need to have a minimum of six full 360° turns into the ultimate thread.

WATERPROOFING (apply only to a dry surface)

Use a sealant between the rubber washer and the roof sheeting to waterproof the roof.

The PurLink anchor point is now ready for use, giving you, an anchor point to attach to while installing the next SafetyLink.

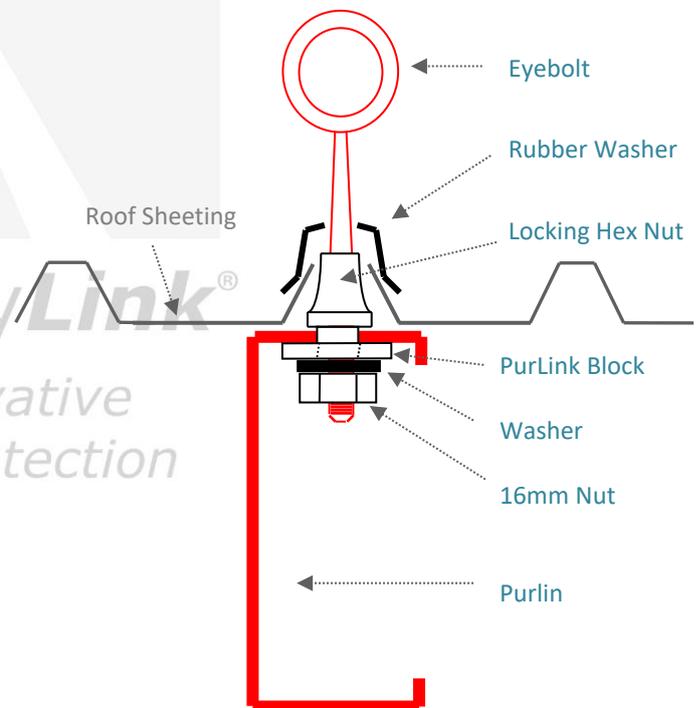

FROGLINK ANCHOR UNIT

Product Code: FROGL001

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

- ⚠ FROGLINK ANCHORS MUST NOT BE USED FOR ROPE ACCESS (ABSEILING).**
- ⚠ MAXIMUM USER PER FROGLINK IS ONE (1) PERSON.**

INSPECT THE INTEGRITY OF THE STRUCTURE AND ROOF SHEETING

- Installation of anchors can only be made to roof sheeting strong enough to support the anchor point.
- **MINIMUM** roof sheet gauge is **0.42mm** for steel and **0.7mm** for aluminium.
- Roof sheets must be inspected thoroughly for splits, rust, corrosion damage and correct installation.
- Ensure the roof sheeting and structure is secured in accordance with current building codes and manufactures instructions.

POSITIONING OF FROGLINK ANCHOR POINT (refer to Appendix Diagram 2)

1. The first FrogLink must be in a position easily and safely reached from a safe access point Access to the underside of the roof is not required for installation.
2. It is recommended the FrogLink be installed to the top/high section of the roof sheeting profile aligned with the fall of the roof, where this is not practical the FrogLink may be installed into the low/pan section, be sure not to create an area where leaves and debris can collect.
3. Ensure FrogLink is installed between a minimum of two purlins/battens, with the roof sheeting being installed/secured down as per manufacturers recommendations.
4. FrogLink Anchors must be positioned a **MINIMUM OF 2 METRES** from the edge on clip down/standing seam style roofs.

BROWNBUILT / KLIPIKLOK ROOF PROFILES

On clip down style roofs (such as Brownbuilt/Kliplok), surface mounted anchors must not be installed any closer than two (2) metres from an edge unless additional securing of roof sheeting is made.

Additional securing can be made to roof sheets with 12 gauge roofing screws through the roof sheeting into the purlin/batten, **four (4) above** or **four (4) below** the anchor, on the side of the anchor that falls under two metres from an edge. This secures the roof sheeting in place to the purlins/battens to prevent horizontal movement in the event of a fall.


Note: screws may be required on both sides of the anchor depending on the individual situation.



COMPONENTS

1 x FrogLink Plate

7 x Gesipa Bulbrite Rivets RV6605-9-6W
(drill size 7.8-8.2mm, 27.7mm length, 1.0-9.5mm grip range, Aluminium)

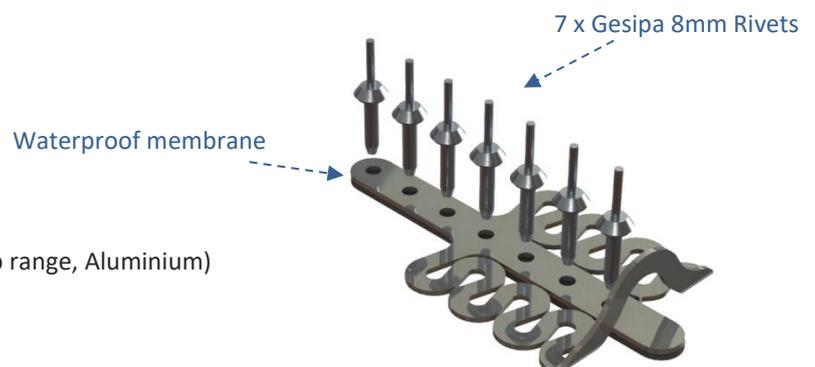


INSTALLATION: TO THE SURFACE OF A METAL ROOF

1. Place the FrogLink on the surface of the roof sheet running parallel with the sheets profile in the required location. FrogLink anchor is recommended to be installed in the top section of the profile aligned with the fall of the roof, when this cannot be achieved the FrogLink can be installed into the pan, be sure not to create an area where leaves or debris can collect.
2. Drill Seven (7) x 8mm holes into the roof sheets through the locating holes on the FrogLink.
3. Secure the FrogLink to the roof by riveting through the holes in the FrogLink Anchor and the roof sheet using 8mm Gesipa Rivets. *Use QR code below for video installation.*
4. The FrogLink Anchor Point is now ready for use, giving you, an anchor point to attach to while installing the next FrogLink.

Live Load on Anchors:

The FrogLink anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees FrogLinks should be used in conjunction with other access methods to ensure no live loading. Note: These anchors are not abseiling anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

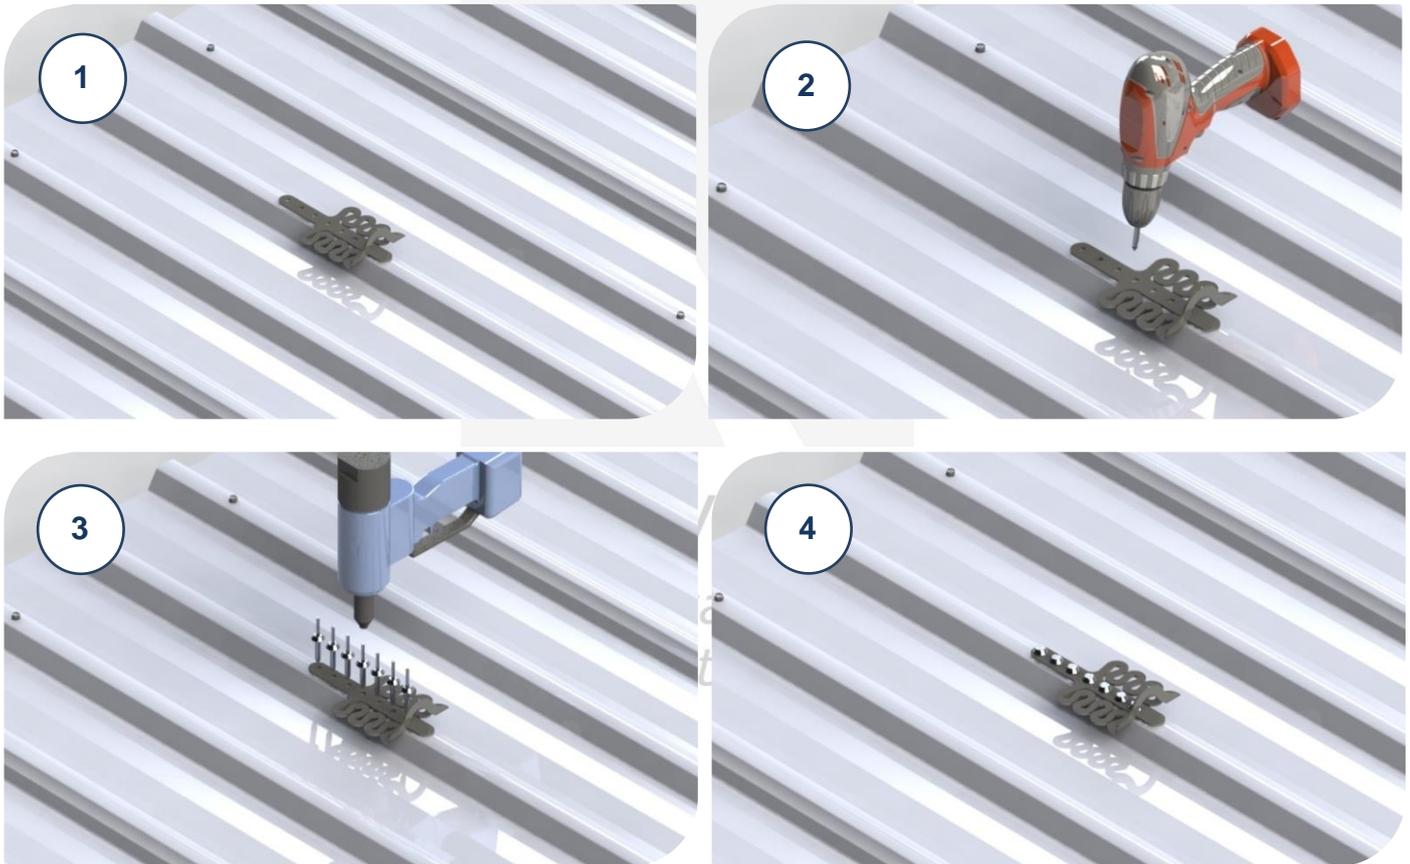

- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**
- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**



Install
Webinar



Installation
Guide



Video
Installation



Catalogue



www.safetylink.com
Terms/Conditions/Warranties

CLASSIC SURFACELINK ANCHOR

Product Code: ASURF001

⚠ SURFACE MOUNTED ANCHORS MUST NOT BE USED FOR ROPE ACCESS (ABSEILING).

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF SURFACELINK ANCHOR POINT (refer to Appendix Diagram)

- The first SurfaceLink must be in a position easily and safely reached from a safe access point. Access to underside of roof is not required for installation.
- It is recommended the SurfaceLink be installed to the top/high section of the roof sheeting profile aligned with the fall of the roof, where this is not practical the SurfaceLink may be installed into the low/pan section, be sure not to create an area where leaves and debris can collect.
- Ensure SurfaceLink is installed between a minimum of two purlins/battens, with the roof sheeting being installed/secured down as per manufacturers recommendations.
- SurfaceLink Anchors must be positioned a **MINIMUM OF 2 METRES** from the edge on clip down/standing seam style roofs.

Live Load on Anchors:

The surface mounted anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees surface mounted anchors should be used in conjunction with other access methods to ensure no live loading. Note: these anchors are not abseiling anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

COMPONENTS


1 x Stainless Steel Eyebolt



1 x Locking Hex Nut



1 x Classic SurfaceLink Plate with foam tape

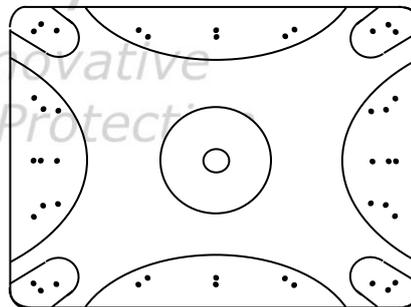

1 x 70mm Plastic Washer




1 x 50mm Stainless Steel Washer



1 x Stainless Steel M16 Nut



SETTING OUT

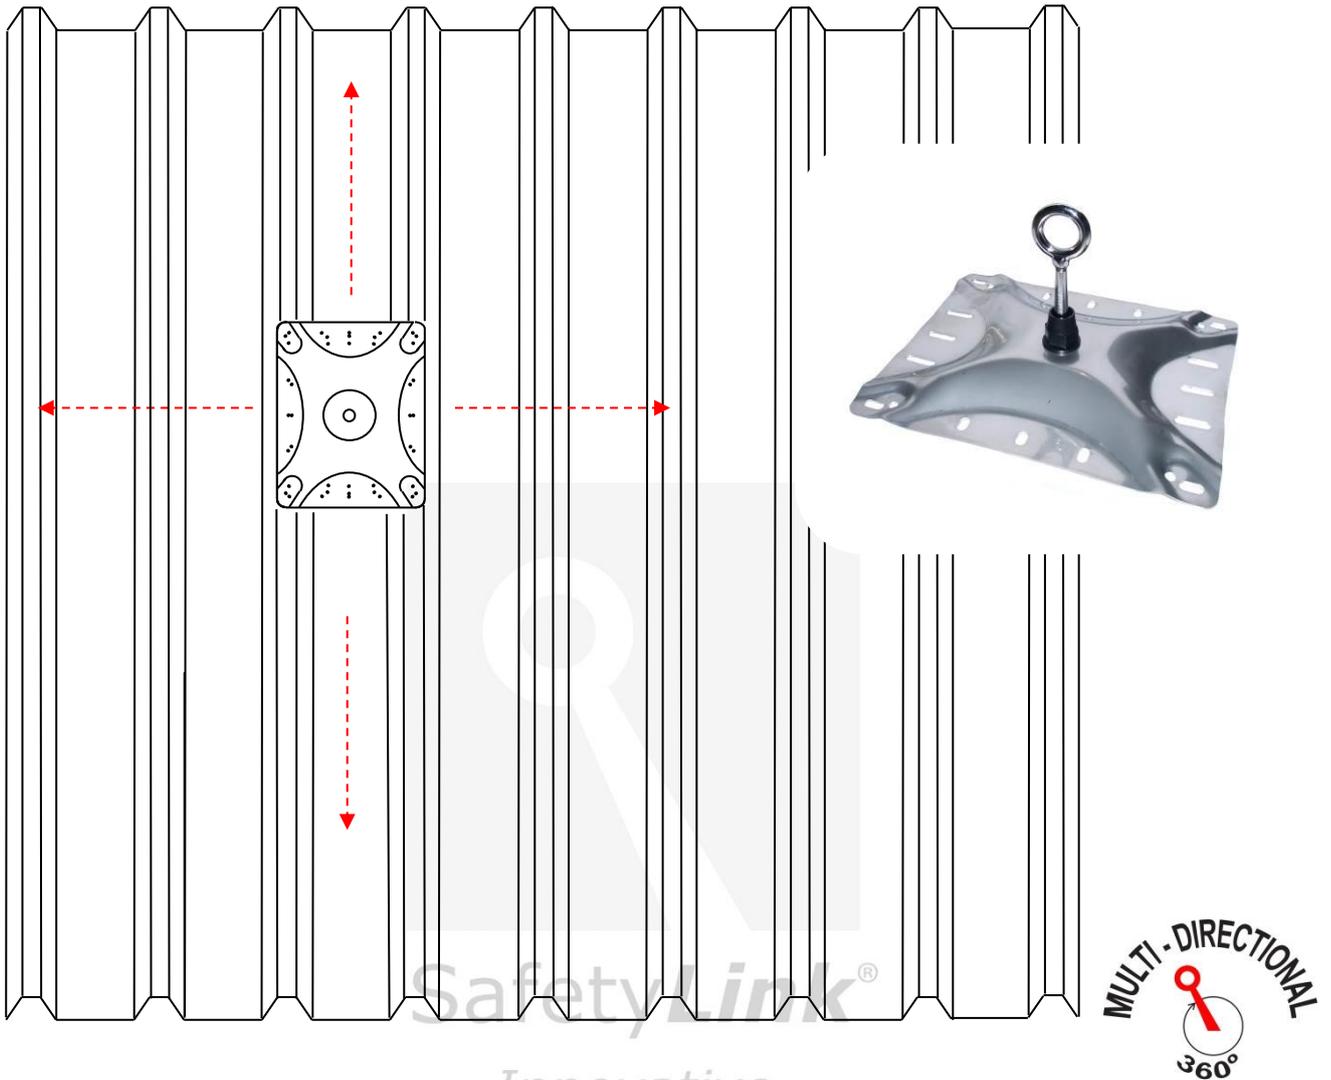

INSPECT THE INTEGRITY OF THE STRUCTURE AND ROOF SHEETING

- Installation of anchors can only be made to roof sheeting strong enough to support the anchor point.
- **MINIMUM** roof sheet gauge is **0.42mm** for steel and **0.7mm** for aluminium.
- Roof sheets must be inspected thoroughly for splits, rust, corrosion damage and correct installation.
- Ensure the roof sheeting and structure is secured in accordance with current building codes and manufactures instructions.
- Place Surface Mounted Anchor in desired location to match holes with roof profile.

BROWNBUILT / KLIPLOK ROOF PROFILES

On clip down style roofs (such as Brownbuilt/Kliplok), surface mounted anchors must not be installed any closer than two (2) metres from an edge unless additional securing of roof sheeting is made.

Additional securing can be made to roof sheets with 12 gauge roofing screws through the roof sheeting into the purlin/batten, **four (4) above** or **four (4) below** the anchor, on the side of the anchor that falls under two metres from an edge. This secures the roof sheeting in place to the purlins/battens to prevent horizontal movement in the event of a fall.

Note: screws may be required on both sides of the anchor depending on the individual situation.



- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

WARNING: SURFACE MOUNTED ANCHORS SHOULD BE POSITIONED A MINIMUM OF 2 METRES FROM THE EDGE ON KLIPLOK ROOFS.

INSTALLATION TO THE SURFACE OF A ROOF - ASSEMBLING: Steps 1 to 5


STEP 1

Apply adhesive waterproofing membrane under rivet location.

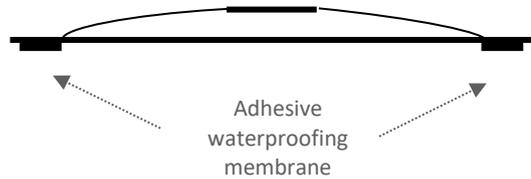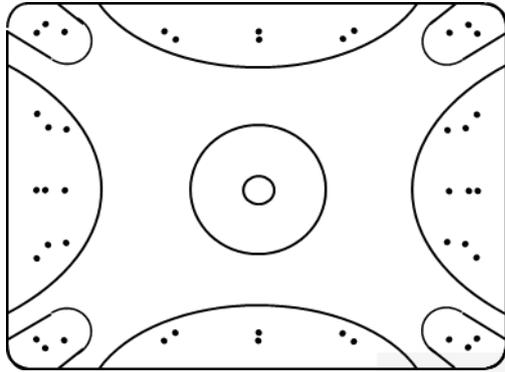


STEP 2

Screw locking hex nut into eyebolt leaving 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).

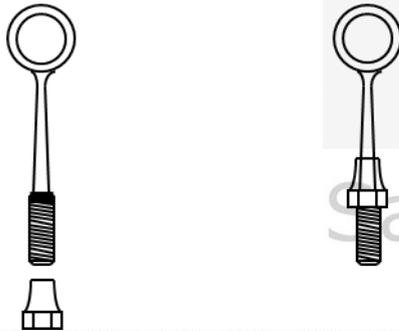


STEP 3

Insert eyebolt through Classic SurfaceLink Plate.

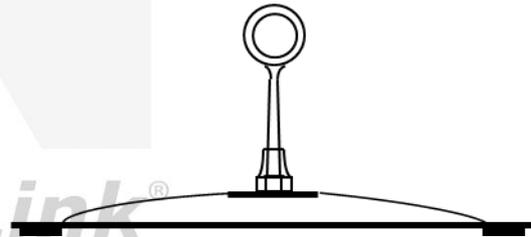


STEP 4

Apply a 70mm plastic washer, 50mm stainless steel washer and nut to underside of the surface plate, tighten nut finger tight (**coat threads with Loctite**).

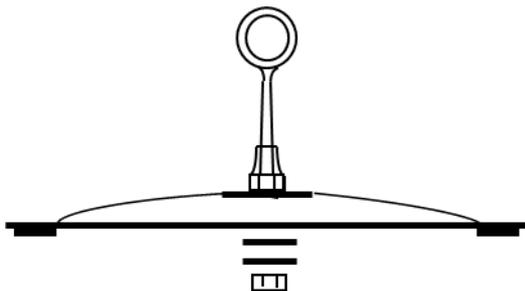

STEP 5

Tighten nut and Locking Hex Nut making certain eyebolt lines up with fall of roof.

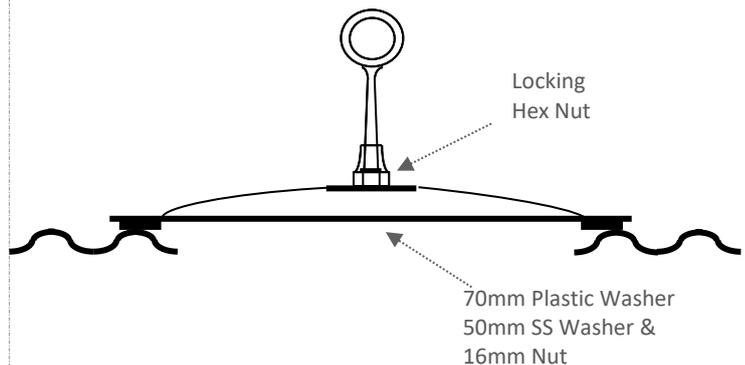


Threads need to have a minimum of **six full 360° turns** into the ultimate thread.

INSTALLING: Steps 1 to 3

WARNING: SURFACE MOUNTED ANCHORS SHOULD BE POSITIONED A MINIMUM OF 2 METRES FROM THE EDGE ON KLIPLOK ROOFS.

1. Place SurfaceLink on surface of roof sheets in required location.
2. Drill Ten (10) 8mm holes into roof sheets through locating holes on both sides of the SurfaceLink (5 each side).
3. Secure the SurfaceLink to the roof by riveting through holes in surface mounted anchor and roof sheet using Gesipa Bulbtite Rivets, RV6605-9-6W (Drill Size 7.8-8.2mm, 27.7mm length, 1.0-9.5mm grip range, Aluminium).

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

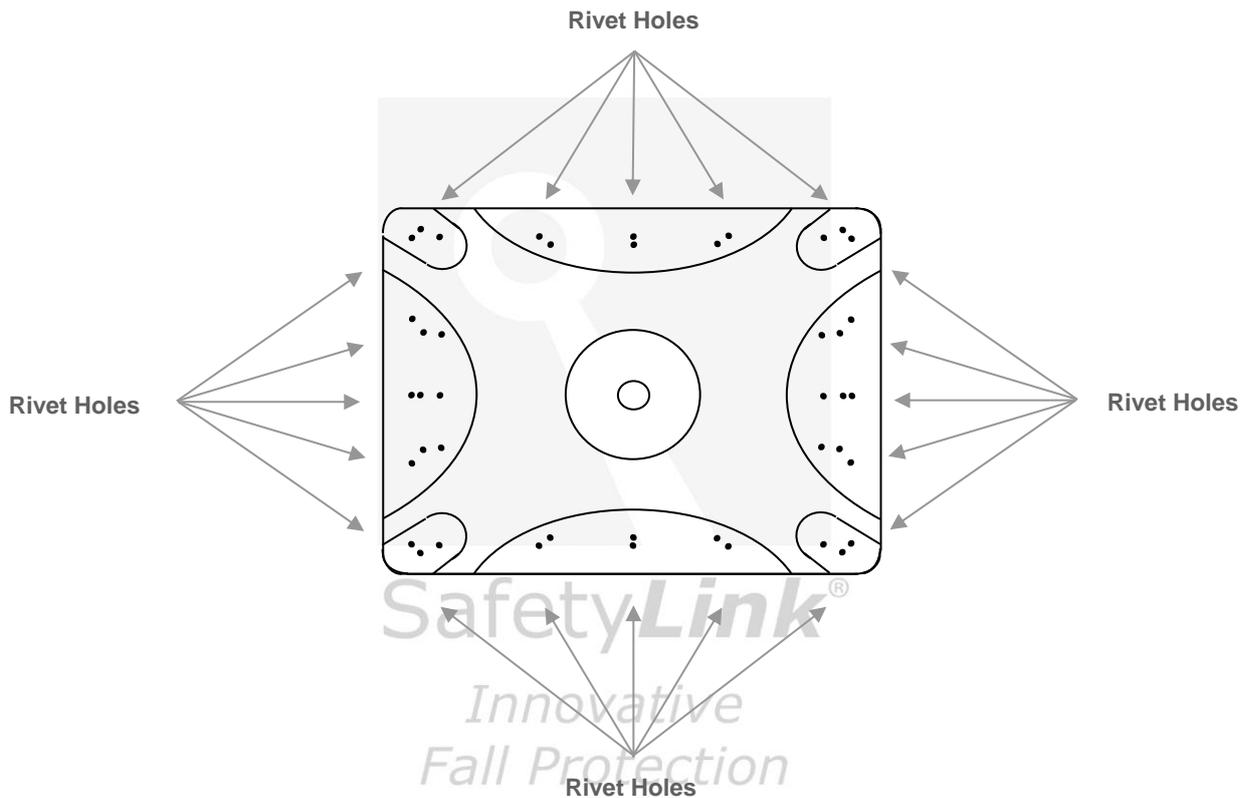

The SafetyLink Anchor Point is now ready for use, giving you an anchor point to attach to while installing the next SafetyLink.

Live Load on Anchors:

The surface mounted anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees surface mounted anchors should be used in conjunction with other access methods to ensure no live loading. Note: these anchors are not abseil anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

SURFACELINK ANCHOR STAINLESS STEEL – DOUBLE PLATES

Product Code: SURFL001

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

⚠ SURFACE MOUNTED ANCHORS MUST NOT BE USED FOR ROPE ACCESS (ABSEILING).

INSPECT THE INTEGRITY OF THE STRUCTURE AND ROOF SHEETING

- Installation of anchors can only be made to roof sheeting strong enough to support the anchor point.
- **MINIMUM** roof sheet gauge is **0.42mm** for steel and **0.7mm** for aluminium.
- Roof sheets must be inspected thoroughly for splits, rust, corrosion damage and correct installation.
- Ensure the roof sheeting and structure is secured in accordance with current building codes and manufactures instructions.

POSITIONING OF SURFACELINK ANCHOR POINT (refer to Appendix Diagram 2)

- The first SurfaceLink must be in a position easily and safely reached from a safe access point. Access to underside of roof is not required for installation.
- It is recommended the SurfaceLink be installed to the top/high section of the roof sheeting profile aligned with the fall of the roof, where this is not practical the SurfaceLink may be installed into the low/pan section, be sure not to create an area where leaves and debris can collect.
- Ensure SurfaceLink is installed between a minimum of two purlins/battens, with the roof sheeting being installed/secured down as per manufacturers recommendations.
- SurfaceLink Anchors must be positioned a **MINIMUM OF 2 METRES** from the edge on clip down/standing seam style roofs.


Live Load on Anchors:

The Surface Mounted anchor is best suited to roof pitches up to 30 degrees. For over 30 degrees Surface Mounted anchors should be used in conjunction with other access methods to ensure no live loading. Note: These anchors are not abseiling anchors and therefore if they are subjected to a live load this may trigger the energy absorbing regions.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

Components

- 1 x Stainless Steel Eyebolt with Locking Hex Nut
- 1 x 70mm Stainless Steel Washer
- 2 x Stainless Steel Side Plates with foam tape
- 1 x 50mm Stainless Steel Washer
- 1 x M16 Nut

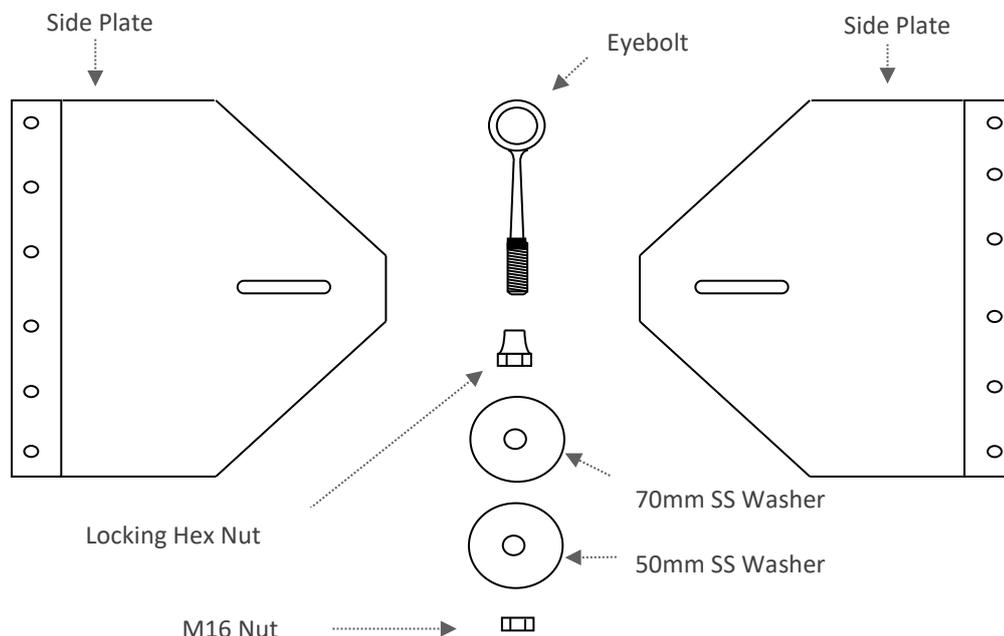

SURFACELINK ANCHOR STAINLESS STEEL – DOUBLE PLATES


Product Code: SURFL001

INSTALLATION: TO THE SURFACE OF A ROOF – Double Plates

ASSEMBLING: Steps 1 to 5

STEP 1

Overlap side plates, aligning slots for Eyebolt.

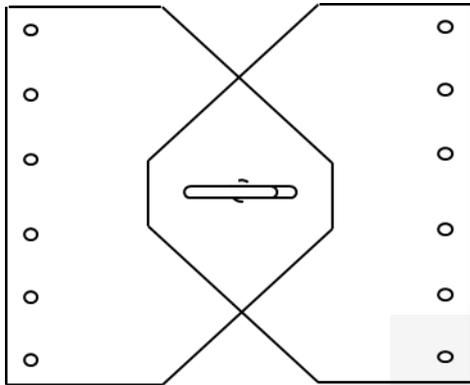

STEP 2

Screw locking hex nut into eyebolt leaving 30mm of thread, coat threads with Loctite (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).




STEP 3

Add 70mm stainless steel washer to eyebolt thread.




STEP 4

Insert eyebolt through side plates.

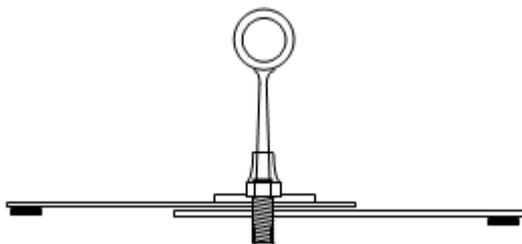

STEP 5

Apply 50mm stainless steel washer and nut, tighten nut finger tight (**coat threads with Loctite**).

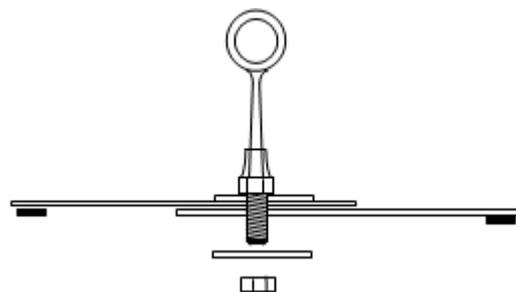


Assembling continued over.....

SURFACELINK ANCHOR STAINLESS STEEL – DOUBLE PLATES

Product Code: SURFL001

INSTALLATION: TO THE SURFACE OF A ROOF – Double Plates

ASSEMBLING: Steps: 6 to 7

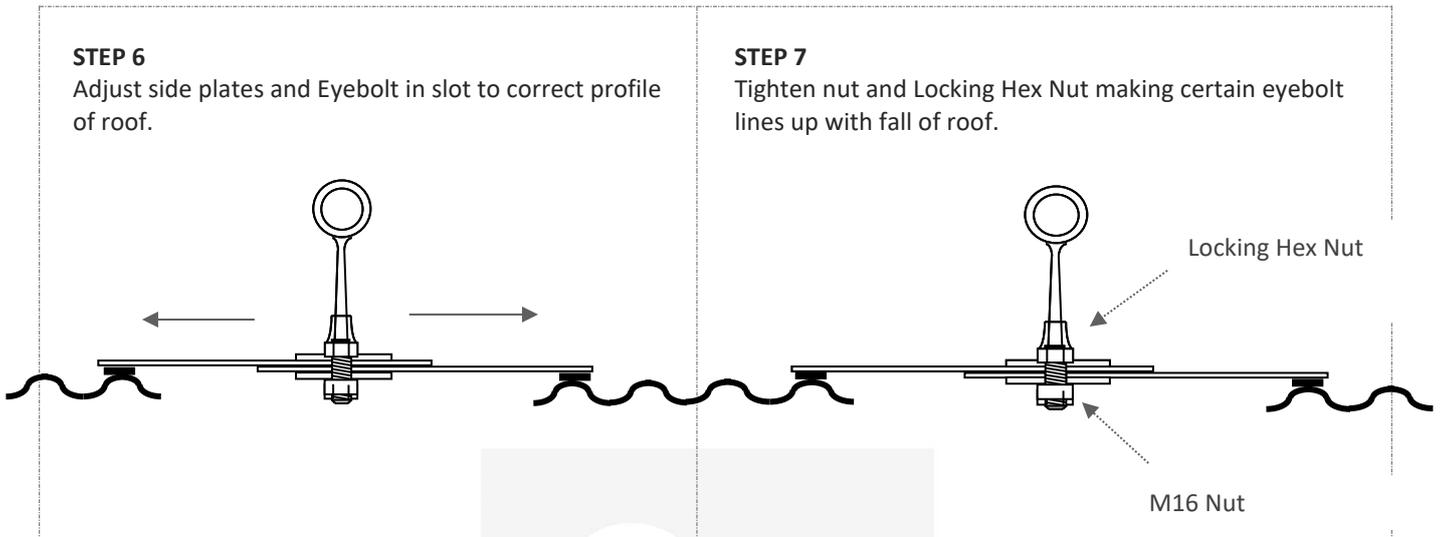


Threads need to have a minimum of **six full 360° turns** into the ultimate thread.

INSTALLING: Steps 1 to 3

WARNING: SURFACE MOUNTED ANCHORS SHOULD BE POSITIONED A MINIMUM OF 2 METRES FROM THE EDGE ON KLIPLOK ROOFS.

1. Place SurfaceLink Anchor on surface of roof sheets in required location.
2. Drill twelve 12 x 8mm holes into roof sheets through rivet holes on both sides of the SurfaceLink Anchor.
3. Secure the SurfaceLink Anchor to the roof by riveting through anchor and roof sheet using 8mm Gesipa rivets.

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

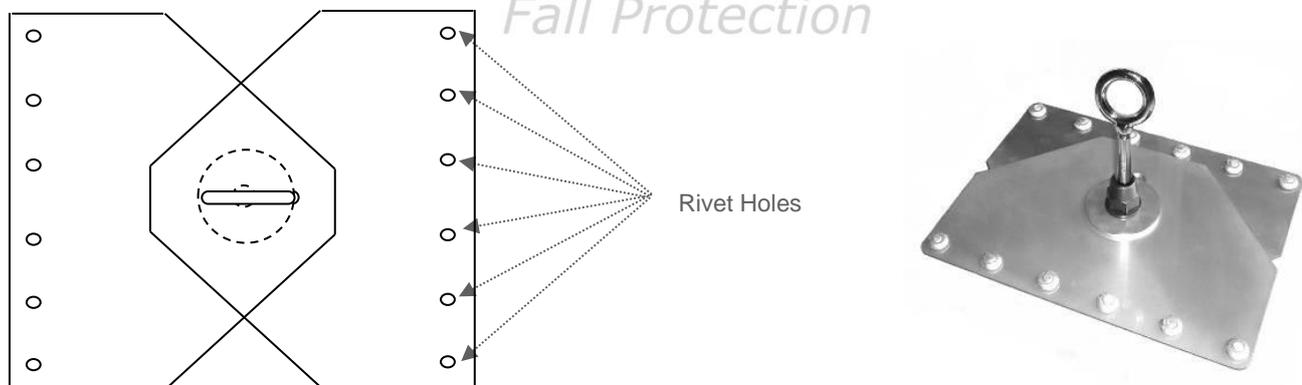

The SafetyLink Anchor Point is now ready for use, giving you an anchor point to attach to while installing the next SafetyLink.

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF CONCRETELINK ANCHOR POINT

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first ConcreteLink Anchor Point must be in a position easily and safely reached from a safe access point.
- ConcreteLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards. *Digital metal detector: BOSCH DMO 10.* Use the detector to locate the steel in the concrete when positioning the ConcreteLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

Drill a 28mm hole to a depth of 100mm.

PREPARING THE HOLE


The hole must be moisture and dust free. Remove the dust using compressed air.

INSTALLING THE CONCRETE INSERT

Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets. Read instructions on product carefully. The whole surface of the ConcreteLink unit in contact with the concrete must use sufficient adhesive gel as specified on the product.

FITTING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. When screwing the 16mm nut onto the stainless steel eyebolt make sure it is fully screwed up exposing 30mm of thread (coat threads with Loctite).
2. Then screw the eyebolt into the ConcreteLink.
3. Ensure the eyebolt is facing the correct direction (refer to [Warnings](#)).
4. Use *Loctite* on the eyebolt thread to ensure that the unit cannot be tampered with (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).

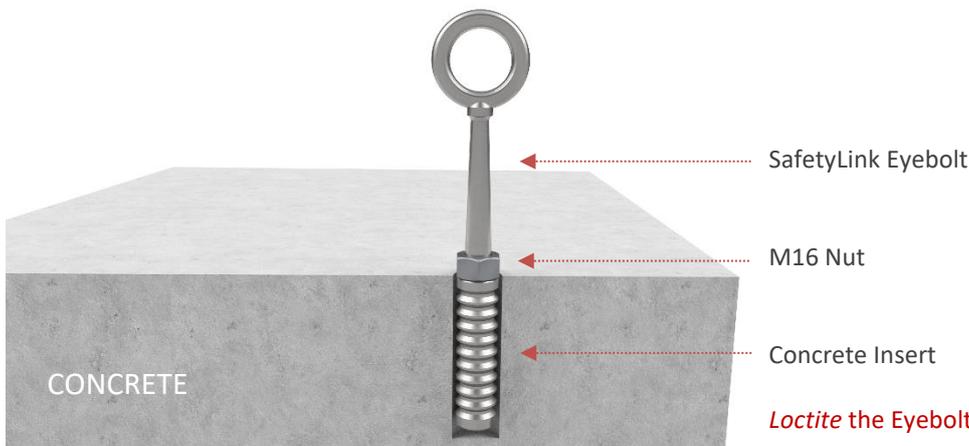

Testing for Free fall-arrest for one person. 15 kN ultimate strength.

To comply with Australian Standards each ConcreteLink unit must be tested after installation. Allow sufficient time at least 48 hours for curing before testing. Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.

ConcreteLink
Installation Video



INSTALLATION: INTO CONCRETE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF CONCRETELINK COLLARED EYEBOLT ANCHOR POINT

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first ConcreteLink Anchor Point must be in a position easily and safely reached from a safe access point.
- ConcreteLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards.

Digital metal detector: BOSCH DMO 10. Use the detector to locate the steel in the concrete when positioning the ConcreteLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

Drill a 28mm hole to a depth of 100mm.

PREPARING THE HOLE

The hole must be moisture and dust free.
Remove the dust using compressed air.

INSTALLING THE CONCRETE INSERT

Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets.
Read instructions on product carefully. Use sufficient adhesive gel as specified on the product instructions.


FITTING THE SAFETYLINK STAINLESS STEEL COLLARED EYEBOLT

1. Screw the collared eyebolt into the ConcreteLink (coat threads with Loctite).
2. Ensure the collared eyebolt is facing the correct direction (refer to [Warnings](#)).
3. Use *Loctite* on the collared eyebolt thread to ensure that the unit cannot be tampered with (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).

Testing for Free fall-arrest for one person. 15 kN ultimate strength.

To comply with Australian Standards each ConcreteLink unit must be tested after installation. Allow sufficient time at least 48 hours for curing before testing. Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.

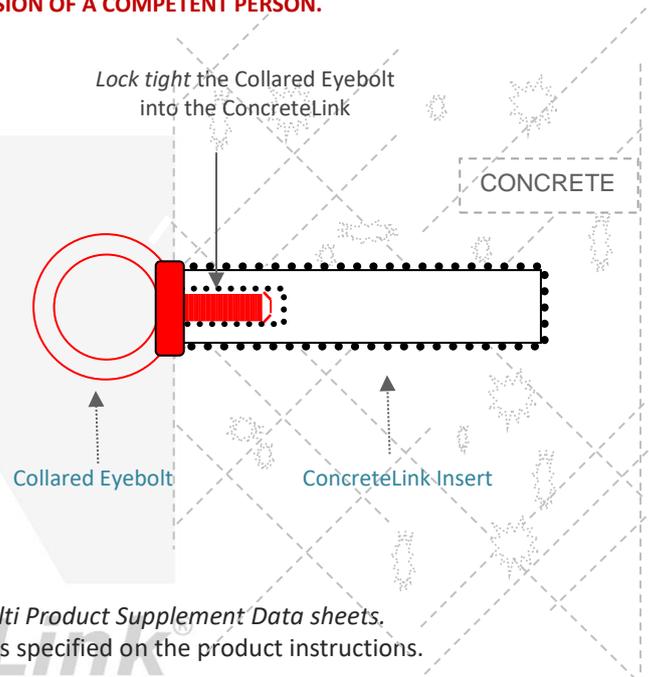

CONCRETELINK ONE PIECE EYEBOLT ANCHOR

Product Code: CONCL005

INSTALLATION: INTO CONCRETE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF CONCRETELINK EYEBOLT ANCHOR POINT

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first ConcreteLink Anchor Point must be in a position easily and safely reached from a safe access point.
- ConcreteLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.

⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.

⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards. *Digital metal detector: BOSCH DMO 10.* Use the detector to locate the steel in the concrete when positioning the ConcreteLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

Drill a 18mm hole to a depth of 100mm.

PREPARING THE HOLE

The hole must be moisture and dust free, remove the dust using compressed air.

INSTALLING

Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets.

Read instructions on product carefully. Use sufficient adhesive gel as specified on the product instructions.



Testing for Free fall-arrest for one person. 15 kN ultimate strength.

To comply with Australian Standards each ConcreteLink unit must be tested after installation.

Allow sufficient time at least 48 hours for curing before testing.

Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.

CONCRETELINK ANCHOR POINT “EXTENDED”

INSTALLATION: INTO CONCRETE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.



POSITIONING OF CONCRETELINK ANCHOR POINT

The pendulum effect still applies (refer to *Appendix Diagram 2*)

- The first ConcreteLink Anchor Point must be in a position easily and safely reached from a safe access point.
- ConcreteLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.

⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.

⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards.

Digital metal detector: BOSCH DMO 10. Use the detector to locate the steel in the concrete when positioning the ConcreteLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

Drill a 28mm hole to the depth required.

PREPARING THE HOLE


The hole must be moisture and dust free. Remove the dust using compressed air.

INSTALLING THE CONCRETE INSERT

1. Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets.
2. Read instructions on product carefully.
3. The whole surface of the extended ConcreteLink unit in contact with the concrete must use sufficient adhesive gel as specified on the product.

FITTING THE SAFETYLINK STAINLESS STEEL EYEBOLT

1. When screwing the 16mm nut onto the stainless steel eyebolt make sure it is fully screwed up exposing 30mm of thread, coat threads with Loctite.
2. Then screw the eyebolt into the spacer assembling the whole unit. Ensure the eyebolt is facing the correct direction (refer to *Warnings*).
3. Use Loctite on the whole unit to ensure that the unit cannot be tampered with (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer’s instructions**).

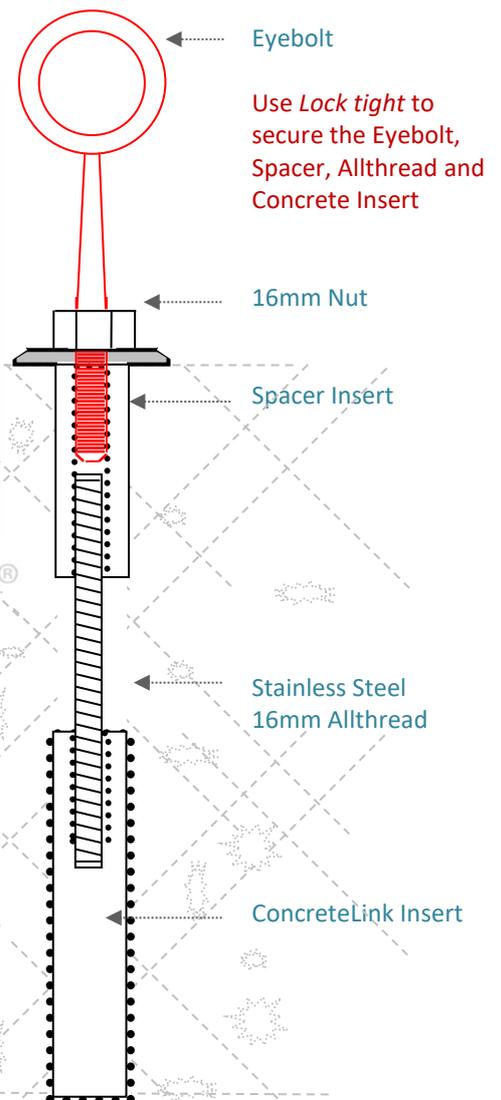

Testing for Free fall-arrest for one person: 15kN ultimate strength

To comply with Australian Standards each ConcreteLink unit must be tested after installation. Allow sufficient time at least 48 hours for curing before testing. Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.

WINDOWLINK ANCHOR POINT

Product Code: WINDW001

INSTALLATION: INTO CONCRETE

WINDOWLINK COMES AS A SINGLE READY TO INSTALL UNIT

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.



POSITIONING OF WINDOWLINK ANCHOR POINT

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first WindowLink Anchor Point must be in a position easily and safely reached from a safe access point.
- WindowLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards.

Digital metal detector: BOSCH DMO 10. Use the detector to locate the steel in the concrete when positioning the WindowLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

1. Two holes must be drilled.
2. Drill first hole using a 55mm hole saw drill to a depth of 20mm.
3. Then drill second hole with a 28mm width and a depth of 122mm.

PREPARING THE HOLE

1. Using a small chisel remove the excess concrete to fit the shape of the WindowLink.
2. The hole must be moisture and dust free, remove the dust using compressed air.

INSTALLING CHEMICAL ANCHOR


Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets.

Read instructions on product carefully. The whole surface of the WindowLink unit in contact with the concrete must use sufficient adhesive gel as specified on the product.

Testing for Free fall-arrest for one person: 15kN ultimate strength

To comply with Australian Standards each WindowLink unit must be tested after installation. Allow sufficient time at least 48 hours for curing before testing. Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding 20 degrees to the surface in which the bolt is installed.

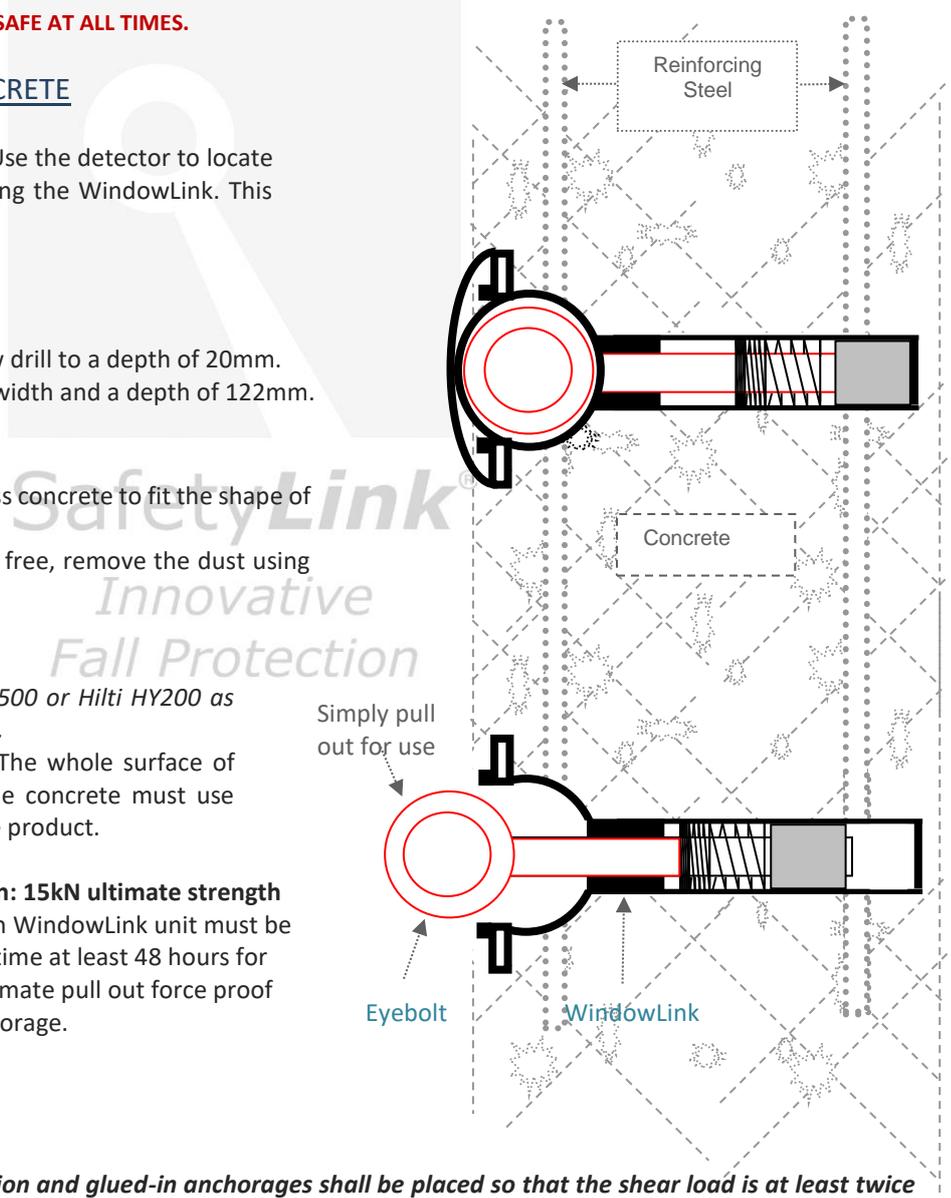

SWIVELINK ANCHOR POINT

With Nut - Product Code: SWIVL001
Without Nut - Product Code: SWIVL002

INSTALLATION: INTO CONCRETE

SWIVELINK COMES AS A SINGLE READY TO INSTALL UNIT

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF SWIVELINK ANCHOR POINT

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first SwiveLink Anchor Point must be in a position easily and safely reached from a safe access point.
- SwiveLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

- ⚠ **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

LOCATING THE STEEL IN THE CONCRETE

To comply with Australian Standards.

Digital metal detector: BOSCH DMO 10. Use the detector to locate the steel in the concrete when positioning the SwiveLink. This ensures steel is avoided when drilling.

DRILLING THE HOLE

Drill a 18mm hole to a depth of 100mm.

PREPARING THE HOLE

The hole must be moisture and dust free.
Remove the dust using compressed air.

INSTALLING CHEMICAL ANCHOR


Recommended chemical anchor: Hilti RE500 or Hilti HY200 as per Hilti Product Supplement Data sheets.

Read instructions on product carefully. The whole surface of the SwiveLink unit in contact with the concrete must use sufficient adhesive gel as specified on the product.

Testing for Free fall-arrest for one person: 15kN ultimate strength

To comply with Australian Standards each SwiveLink unit must be tested after installation. Allow sufficient time at least 48 hours for curing before testing. Test consists of ultimate pull out force proof loading to 50% of design purpose of anchorage.

Note: Drilled-in anchorages such as friction and glued-in anchorages shall be placed so that the shear load is at least twice the tension load. For collared eyebolts this translates to a pull at an angle not exceeding twenty 20 degrees to the surface in which the bolt is installed.

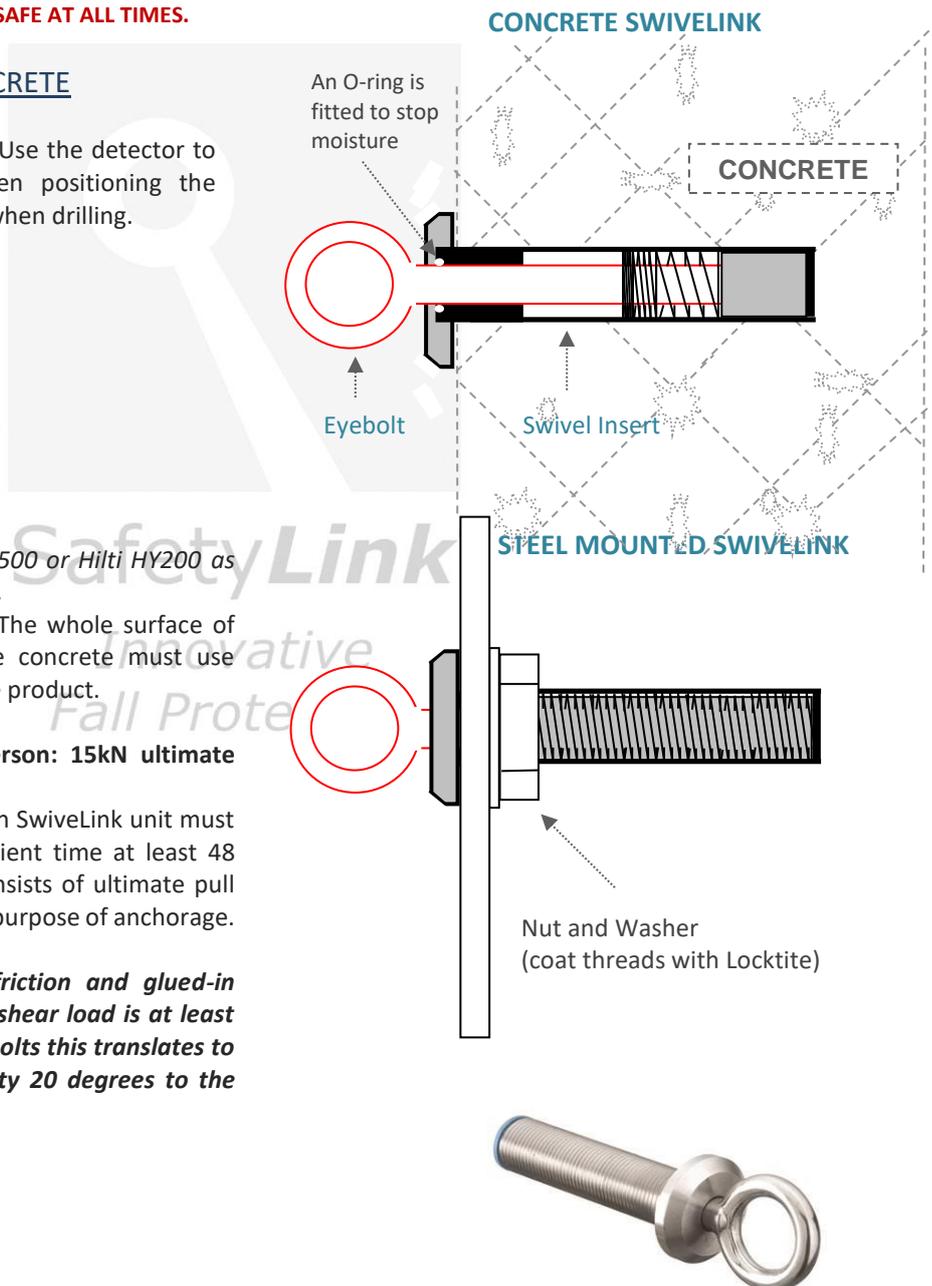

INSTALLATION: THROUGH CONCRETE

All safety procedures must be complied with in accordance with the current safety code(s) of practice(s) for working at heights. Ensure safety at all times during and after installation by using an appropriate height safety protection system.

POSITIONING OF SPACERLINK ANCHOR POINT - To comply with Australian Standards

The pendulum effect still applies (refer to [Appendix Diagram 2](#))

- The first SpacerLink Anchor Point must be in a position easily and safely reached from a safe access point.
- SpacerLink should not be positioned close to an edge, minimum distance 150mm.
- Minimum concrete thickness 100mm.
- If any doubt exists as to the strength of the structure an engineer should make the assessment.

PREPARATION TIPS

Determine the distance that the anchor will be threaded through. Cut the threaded rod if necessary. Hammer Drill – stop hammering action on last section of concrete to prevent blowing out section.

- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**

DRILLING THE HOLE

Drill a pilot hole through the concrete.
Then drill a 25mm hole from either side of the wall, avoid damaging the wall.


FITTING THE STAINLESS STEEL EYEBOLT

1. When screwing the M16 eyenut onto the allthread rod make sure it is fully screwed up exposing end of thread.
2. Use *Loctite* on the eyenut and allthread to ensure that the unit cannot be tampered with (**IMPORTANT NOTE: Before applying Loctite 243 use Loctite 7471 primer to activate the surface according to manufacturer's instructions**).
3. Assemble the 70mm washer with foam onto the rod then push the unit through the wall and fit the 70mm washer and M16 nut.
4. Before tightening the nut turn the eyebolt to the direction required (refer to [Warnings](#)).

Threads need to have a minimum of **six full 360° turns** into the ultimate thread.

EXAMPLE BELOW

Use *Loctite* to secure the Eyebolt, Spacer and Allthread.

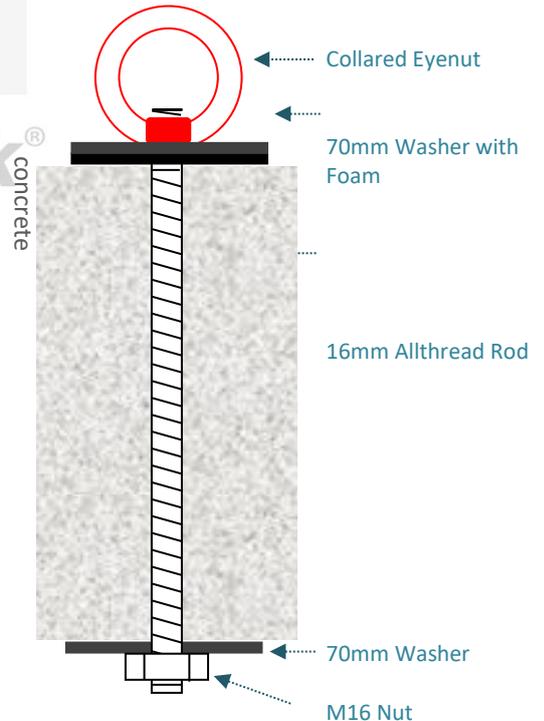

APPENDIX – Diagram 2 – Anchor Positioning Layout


THIS IS A GUIDE ONLY

All working at heights safety procedures must be complied with when installing SafetyLink anchor points. For more information refer to your state or territories current legislation, regulations, policies and codes of practices.

-  **IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
-  **DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**
-  **INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**

ACCESS, LAYOUT AND USE OF A SAFETYLINK ANCHOR SYSTEM

SafetyLink anchor points are positioned by calculating the pendulum effect, this limits the likelihood of a fall past the edge of the roof space. The pendulum effect still applies to a flat roof. Spacing must be no greater than the rafter length, please contact Your distributor if you are unsure.

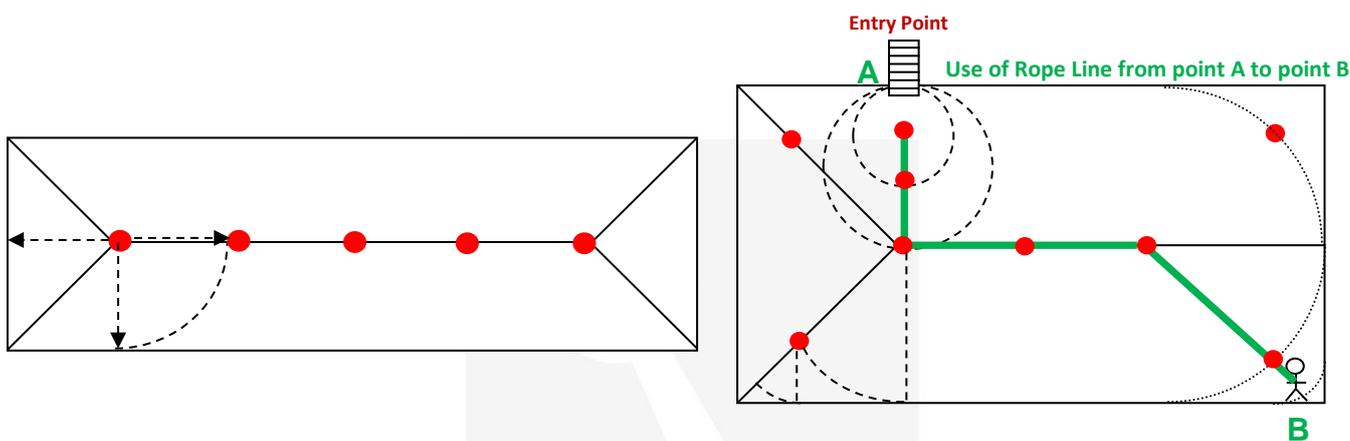

SAFETYLINK HEIGHT SAFETY SYSTEMS MUST ONLY BE INSTALLED AS PER OUR INSTALLATION GUIDES, TO STRUCTURES AS SPECIFIED IN THE INSTALLATION MANUAL FOR EACH PRODUCT. SHOULD ANY DOUBT EXIST IN REGARD TO THE STRUCTURES INTEGRITY AN ENGINEER SHOULD BE CONSULTED.

SafetyLink®


EXPERT FALL PROTECTION PLANNING

SafetyLink's design and planning team are here to help work out the positioning of your fall protection system, ensuring all areas of your roof are accessed safely.

Things to consider when planning your roof layout:





- Are all areas of your roof protected, allowing complete access when working at heights?
- Are you protected from the ground up, allowing complete access to your roof?
- Detailed comprehensive documentation provided e.g. installation guides, testing results, product sheets should be provided.
- SafetyLink can also provide you with a qualified and reputable installer of SafetyLink products.

Contact our design team at info@safetylink.com and we can plan your fall arrest system for you.

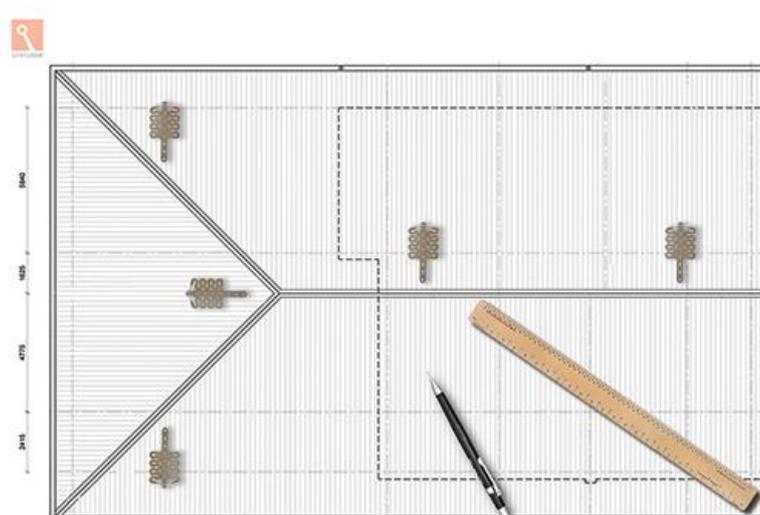

APPENDIX – Diagram 3 – Lateral Bracing Straps

**LATERAL BRACING STRAPS MUST BE USED IF THERE IS A POSSIBILITY OF FALLING IN A DIRECTION 45 TO 90 DEGREES TO THE RAFTER.
LATERAL BRACING STRAPS AVAILABLE FROM SUPPLIERS.**

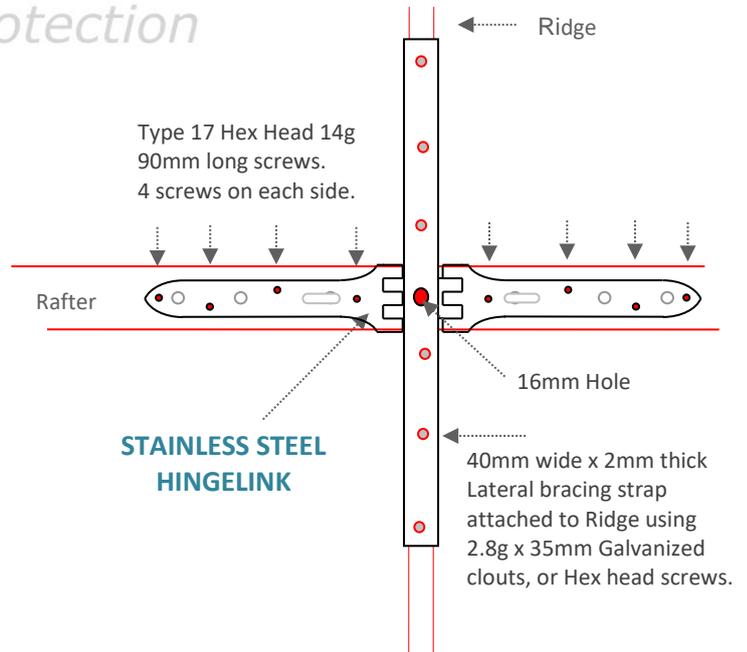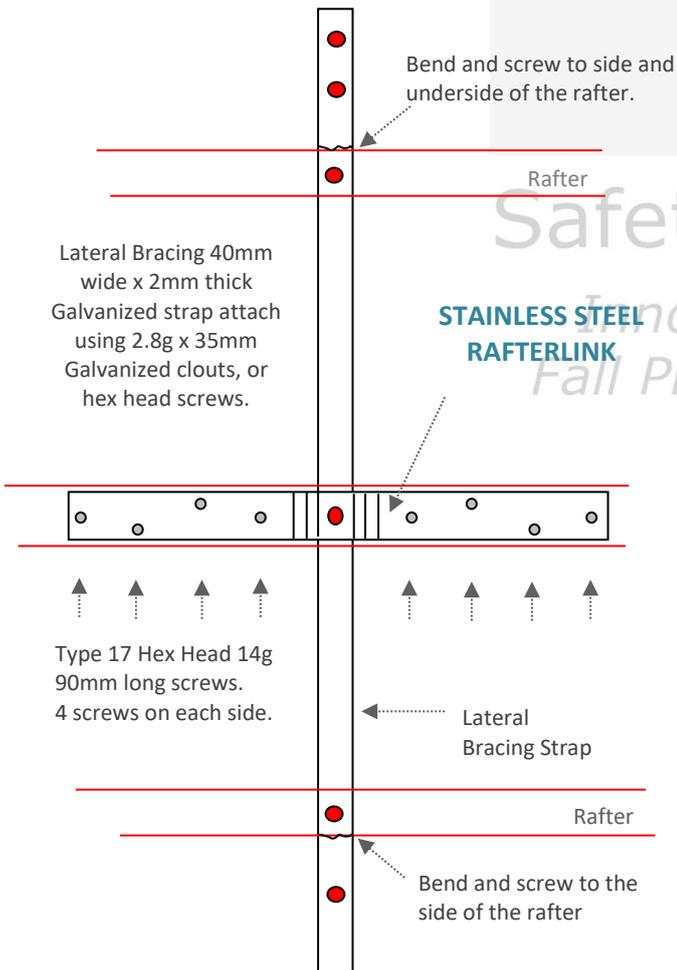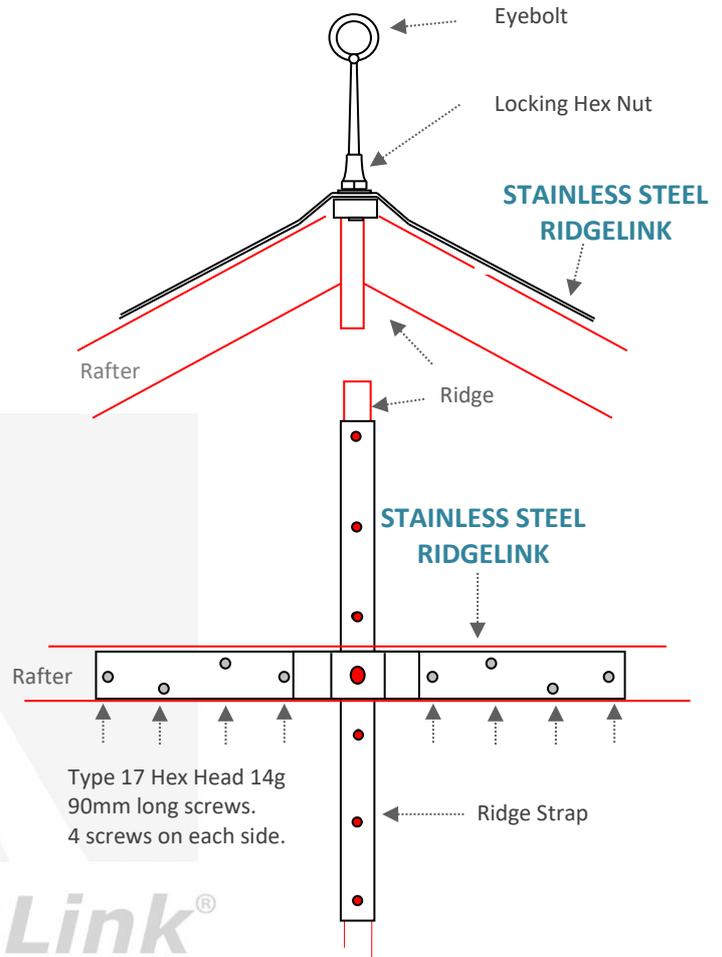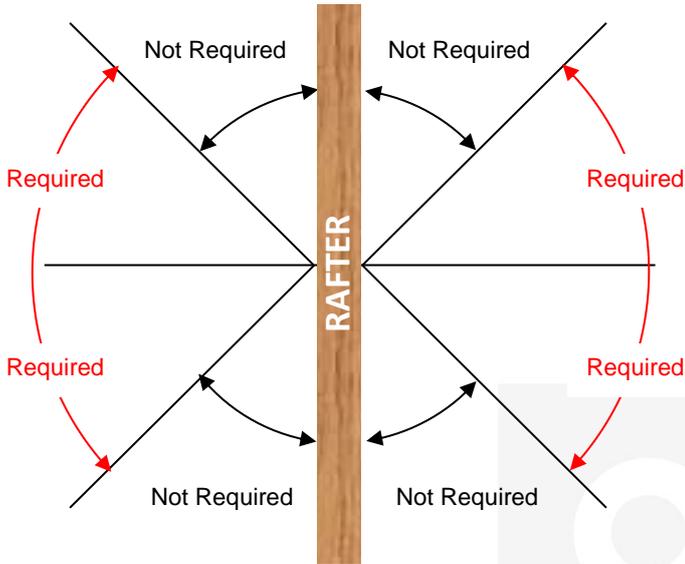

FOR TIMBER GRADES LOWER THEN 90X45 MPG10 DOUBLE STRAP BRACING IS REQUIRED.



APPENDIX – Diagram 4 – Positioning HingeLinks

INSPECT THE TIMBER FOR STRENGTH

Install anchors only to timber strong enough to support the anchor point. Minimum timber size is 35mm by 90mm (grade F5). Inspect the timber for splits, cracks, knots and white ant damage. Ensure the timber structure is secured in accordance with Australian Building Codes.


- ⚠ IF ANY DOUBT EXISTS WITH THE STRENGTH OF THE STRUCTURE OR ROOF SHEETS AN ENGINEER SHOULD MAKE THE ASSESSMENT.**
- ⚠ DURING INSTALLATION YOU MUST BE SAFE AT ALL TIMES.**
- ⚠ INSTALLATION MUST BE CARRIED OUT BY, OR UNDER THE SUPERVISION OF A COMPETENT PERSON.**

STRENGTHEN THE HIPS

Strengthen hips by fixing a steel plate to the hip and down the rafters on either side sharing the load with the rafters.

TRUSSED HIP

PITCHED HIP

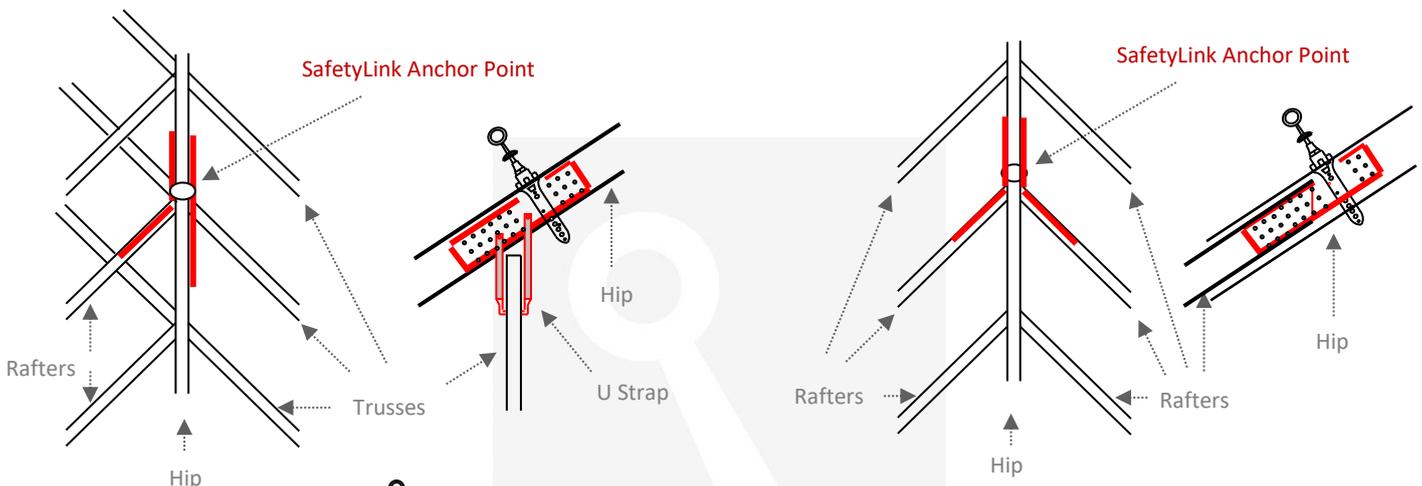

LATERAL BRACING STRAP TO PITCHED ROOF

1. Place the hoop iron strap along the ridge & screw the stainless steel anchor point through the strap.
2. Then screw the strap down onto the ridge giving HingeLink lateral strength.
3. Lateral bracing straps are available from suppliers.


LATERAL BRACING STRAP



Lateral Bracing 2 x 30mm x 1.0mm Galvanised Punched Strapping

U type holding down straps may be required to secure rafters or trusses down.


U STRAP

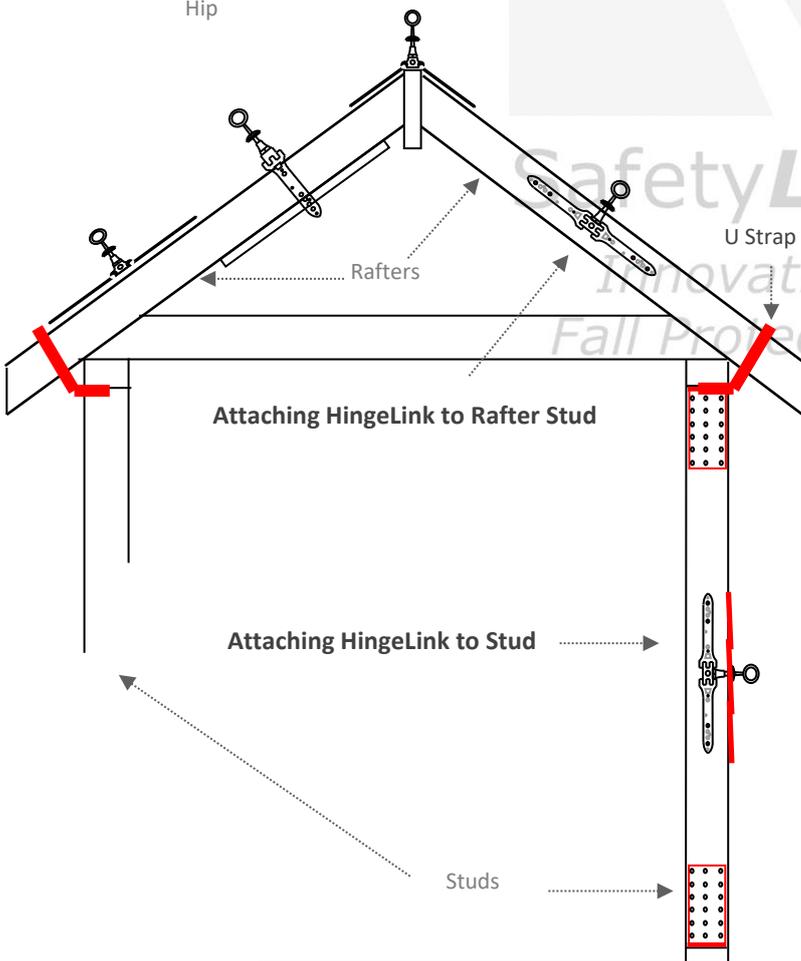


APPENDIX – Diagram 6 – HingeLink Anchors



Energy absorbing batten designed to strengthen the rafter screwed at either end using 12g 50mm hex head screws.

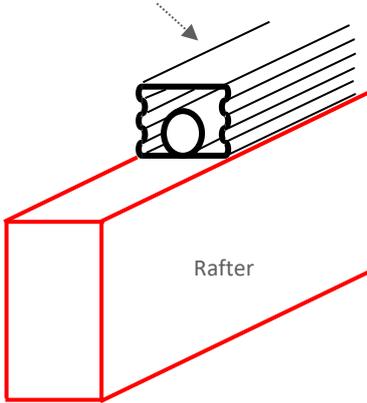


STAINLESS STEEL HINGELINK


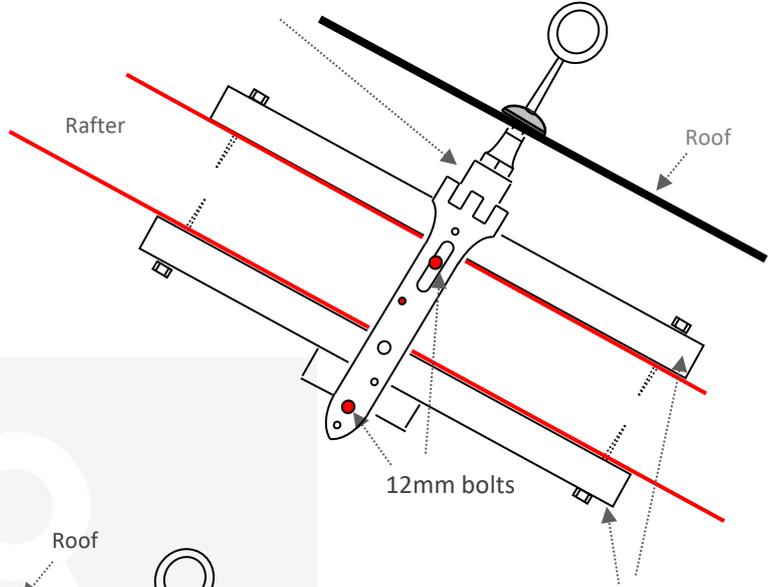


Energy absorbing batten designed to strengthen the rafter.

STAINLESS STEEL HINGELINK

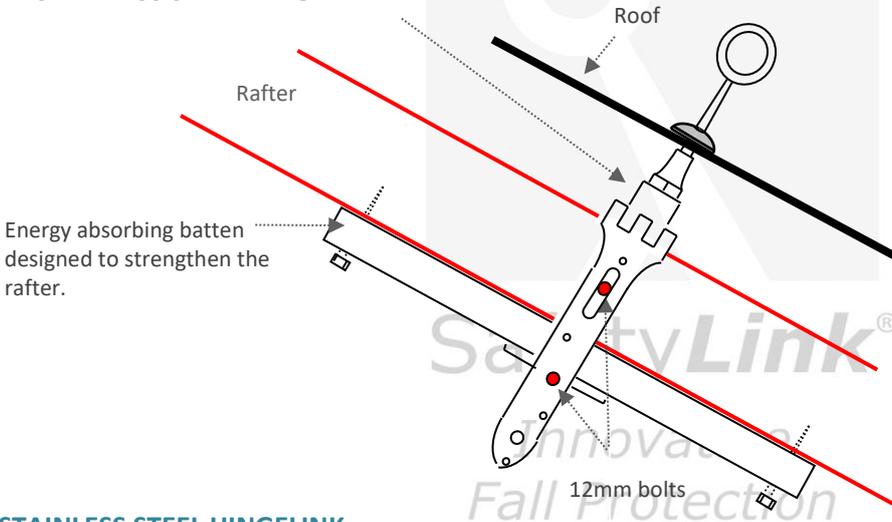

STAINLESS STEEL HINGELINK

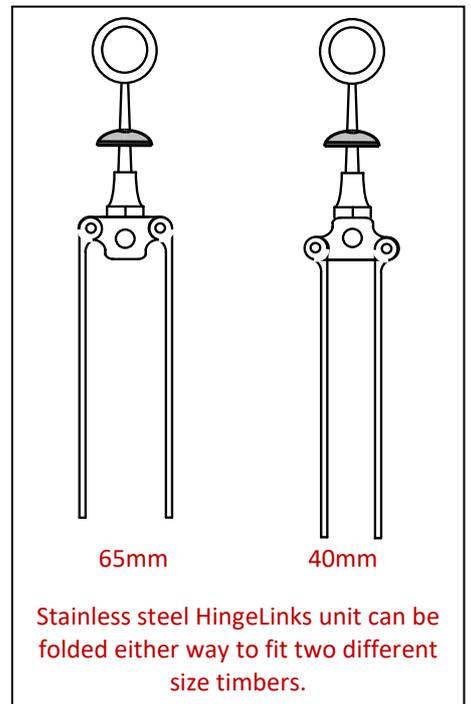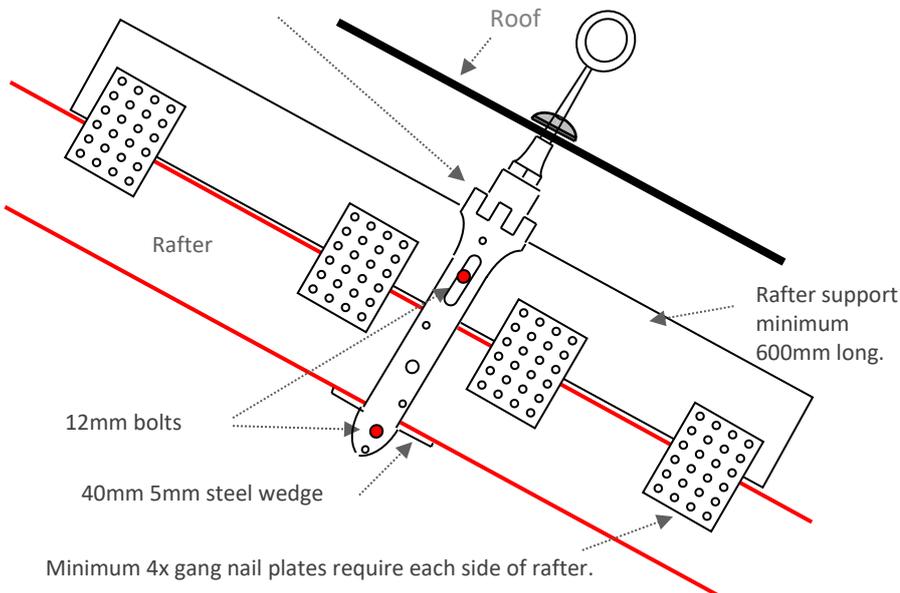



SafetyLink[®]

*Innovative
Fall Protection*

IN CASE OF ACCIDENT

⚠ A FALL RESCUE PLAN SHOULD BE DEVELOPED PRIOR TO USING SAFETYLINK EQUIPMENT.

⚠ PERSONS WORKING AT HEIGHTS SHOULD NOT WORK ALONE.

It is critical that before using any SafetyLink Systems a fall rescue plan is in place for any persons suspended mid-air following a fall. Serious injury or death can occur in a matter of minutes, particularly if a person's movement or breathing is restricted or loss of consciousness has occurred. In accordance with your fall rescue plan and appropriate first aid procedures it is essential to remove the person from the suspended position as quickly as possible.

IN ACCORDANCE WITH AS/NZS 1891.4:2009 CLAUSE 9.5

EQUIPMENT WHICH HAS ARRESTED A FALL OR SHOWS A DEFECT

Any piece of equipment including both personal and permanently installed items, which has been used to arrest a fall or which shows any defect during operator or periodic inspection shall be withdrawn from service immediately and a replacement obtained if necessary. A label indicating the condition or defect should be attached to the equipment, and it should be examined by a competent person who will decide whether the equipment is to be destroyed or repaired if necessary and returned to service. In the latter case, details of any repair shall be documented, and a copy given to the operator.



SafetyLink®

*Innovative
Fall Protection*



Terms/Conditions/Warranties

DISTRIBUTOR:

SafetyLink Pty Ltd | ABN 83 081 777 371

Phone: 1300 789 545 or +61 2 4964 1068 | Fax: 1300 738 071 or +61 2 49641069

info@safetylink.com | www.safetylink.com